




Luna 08 C

Product code


LUN08ABX231NWO8

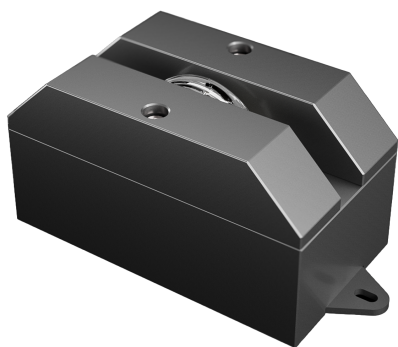

Features

IP rating	IP66
IK rating	08
Source type	High power LED
LED number	4
CRI	80
Step McAdam	3
Source life time	>110.000h L70 B10 at 25°C ambient temperature
Source flux	840 lm
Source efficiency	139,1 lm/W
Delivered flux	745 lm
Delivered efficiency	93,9 lm/W
Input power	8W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	4000 K
Beam angle	115°X3°
Mounting	surface
Finishing	black anodized
Net weight	0,5kg

Technical drawing

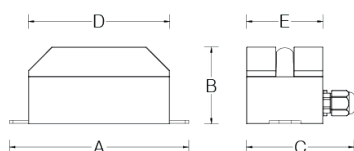

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C

Construction

machine-crafted aluminium alloy, silicone gasket, UV-protected Polycarbonate front cover, nickel-plated brass gland connector, pressure compensation valve, waterstop system

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage, thermal (shut off)

Specifications




Dimensions

A	152mm	B	65mm
C	97mm	D	120mm
E	70mm		




Photometry

115°X3°



4000 K	0.2 m	49,5 Klux
1,98 Kcd	0.5 m	7,9 Klux
744,00 lm	1 m	2,0 Klux
8	2 m	495 lux
	5 m	79 lux


Lighting effects

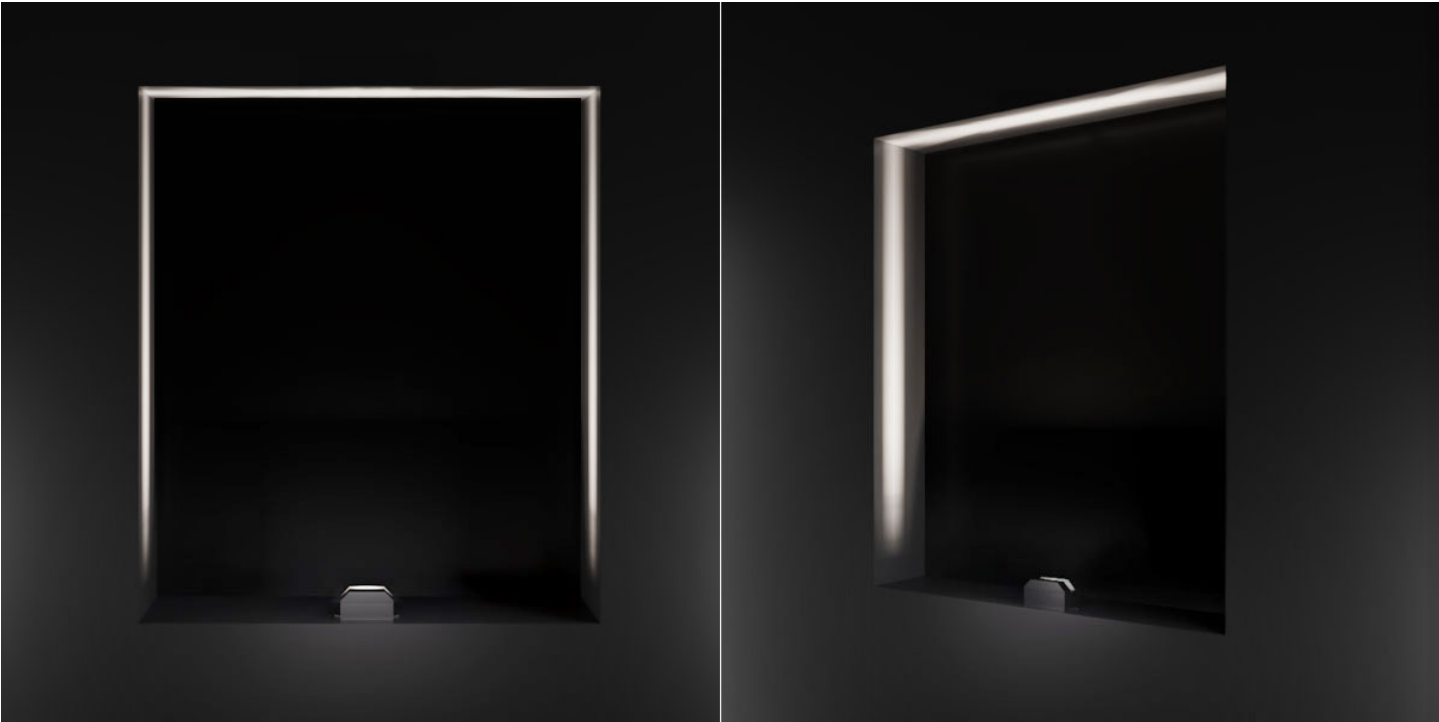

Luna 08 C

Product code

LUN08ABX231NWO8

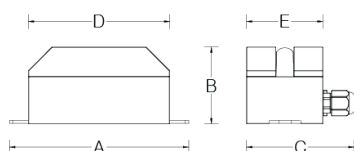Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	152mm	B	65mm
C	97mm	D	120mm
E	70mm		