



Clio Ground Recessed 1081R/WR1.VS.99

Ground Recessed - Recessed in polypropylene with steel ring nut

Rev. 06/03/2023



Clio is a versatile luminaire, available in recessed wall, floor recessed and applique versions. The carefully chosen materials and the high corrosion protection make it suitable for installation in saline environments. The steel outer ring is resistant to corrosion and recyclable, while the polycarbonate of the recessed body remains unaltered even in the face of high temperatures and aggressive atmospheric agents. The absence of iron components, which oxidizing degrades the steel, determines a high longevity of the appliance in unfavorable environmental conditions such as coastal areas with high salinity.

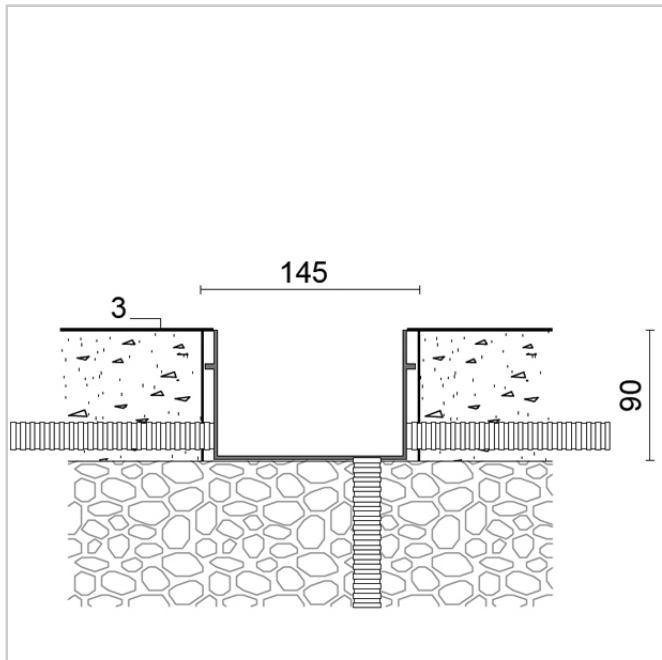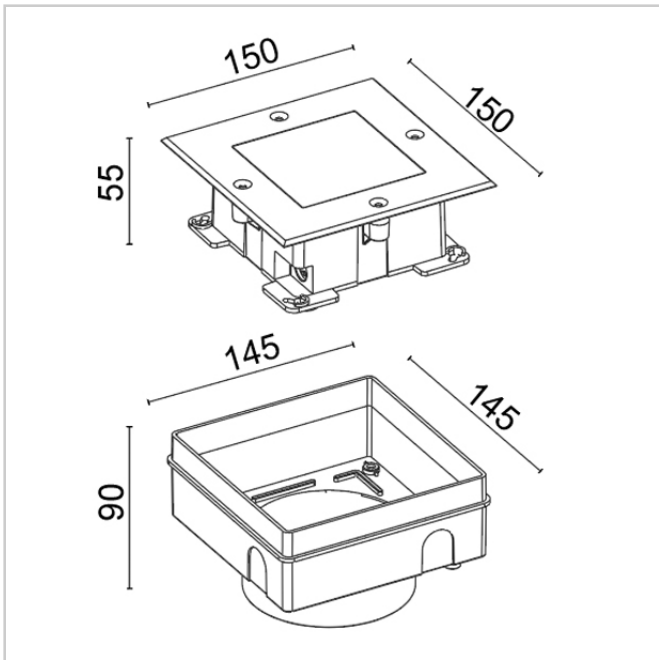

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Inground Recessed

PROTECTION

IP 67 - IK 09

BOX

Stabilised, charged polypropylene PP UV  
GWT750 Cat.V2 Recessed Box

FRAME

Stainless Steel AISI316L

SCREEN

Frosted Glass

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

SIZES

H 150 x L 150 x W 65

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in

CONTROL

ON/OFF

ABSORBED POWER

5W

SOURCE

LED

SOURCE FLUX

450 lm

FIXTURE SOURCE

260 lm

APPARENT EFFICIENCY

58 %

INSULATION CLASS

II

OPERATING TA

50 °

ENERGETIC CLASS

A

CCT LED

3000K

CRI

>80

PHOTOBIOLOGICAL RISK

RG0

BEAM OPENING

Diffuse >100°

COLORS

---



**99**  
STEEL

This product is also available with traditional electrifications. Contact us for more information.