



Up&Down Mini Wall 7551W/NC0.WB

Wall - Wall luminaire Single Emission - Built-in driver

Rev. 28/03/2024



Wall luminaire configurable in single and double emission, ideal for grazing lighting of external facades. Up & Downd mini is equipped with various secondary optics for controlling the light flow, which allow design flexibility through different combinations of direct and indirect emission. The device includes the use of LED sources with built-in driver with fixed or dimmable Dali output on request with a surcharge.

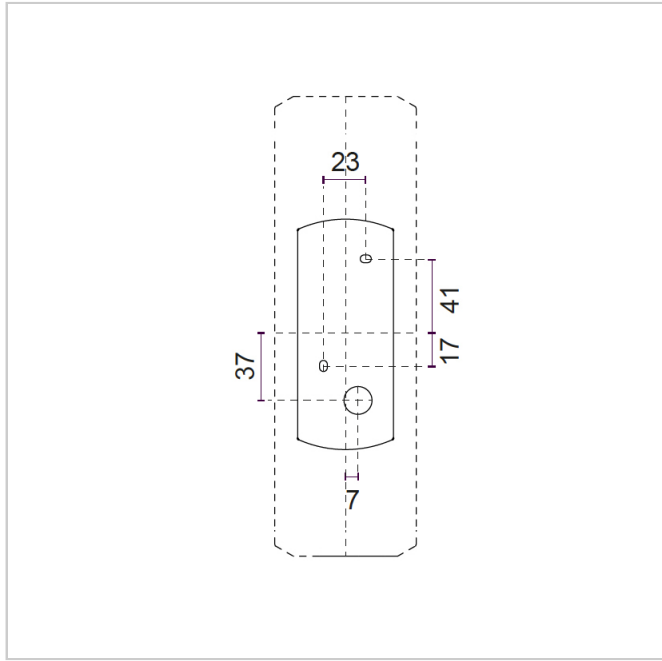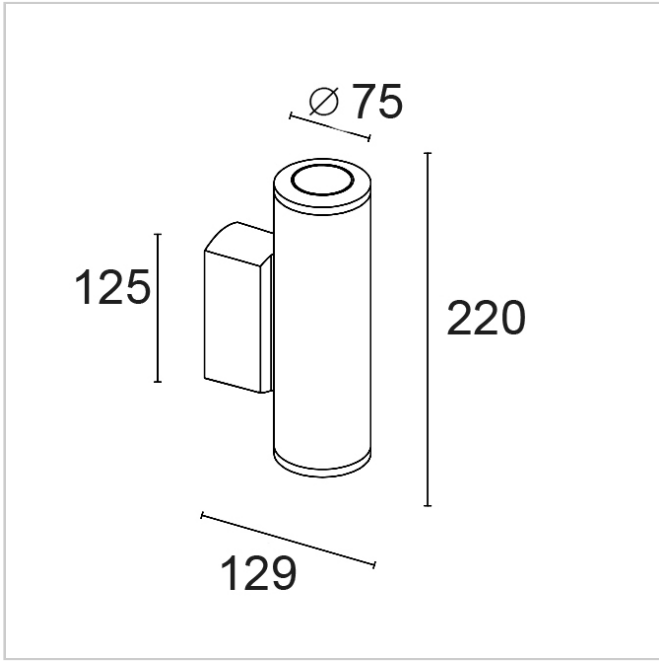

PHOTOMETRICAL DATA



FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 65 - IK 08

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 6mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 220 x W 129 x Ø 75

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER CURRENT

350mA

CONTROL

ON/OFF

POWER MODULE LED

6W

ABSORBED POWER

8W

SOURCE

LED

SOURCE FLUX

825 lm

FIXTURE SOURCE

687 lm

APPARENT EFFICIENCY

83 %

INSULATION CLASS

I

OPERATING TA

50 °

CCT LED

4000K

CRI

>80

STEP MACADAM

3

PHOTOBIOLOGICAL RISK

RG1

BEAM OPENING

Single Wide Flood/56°

COLORS



**00**  
PURE  
WHITE RAL  
9016



**01**  
BLACK RAL  
9005



**10**  
WHITE RAL  
9010



**24**  
BRONZE



**25**  
RUST



**30**  
ANTHRACIT  
E




**35**  
SLATE  
GREY



**40**  
GREY RAL  
9006

This product is also available with traditional electrifications. Contact us for more information.

ACCESSORIES



**E.TRA.580**    Ultra compact type 2+3 hard wired surge protector

L 37 x W 30 x H 30