


Modo Wall 601W1/HD70WB

Wall - Module DALI Single Emission


Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions, capable of being wallwashers, vertically or horizontally, oriented according to the light requirements. It also offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

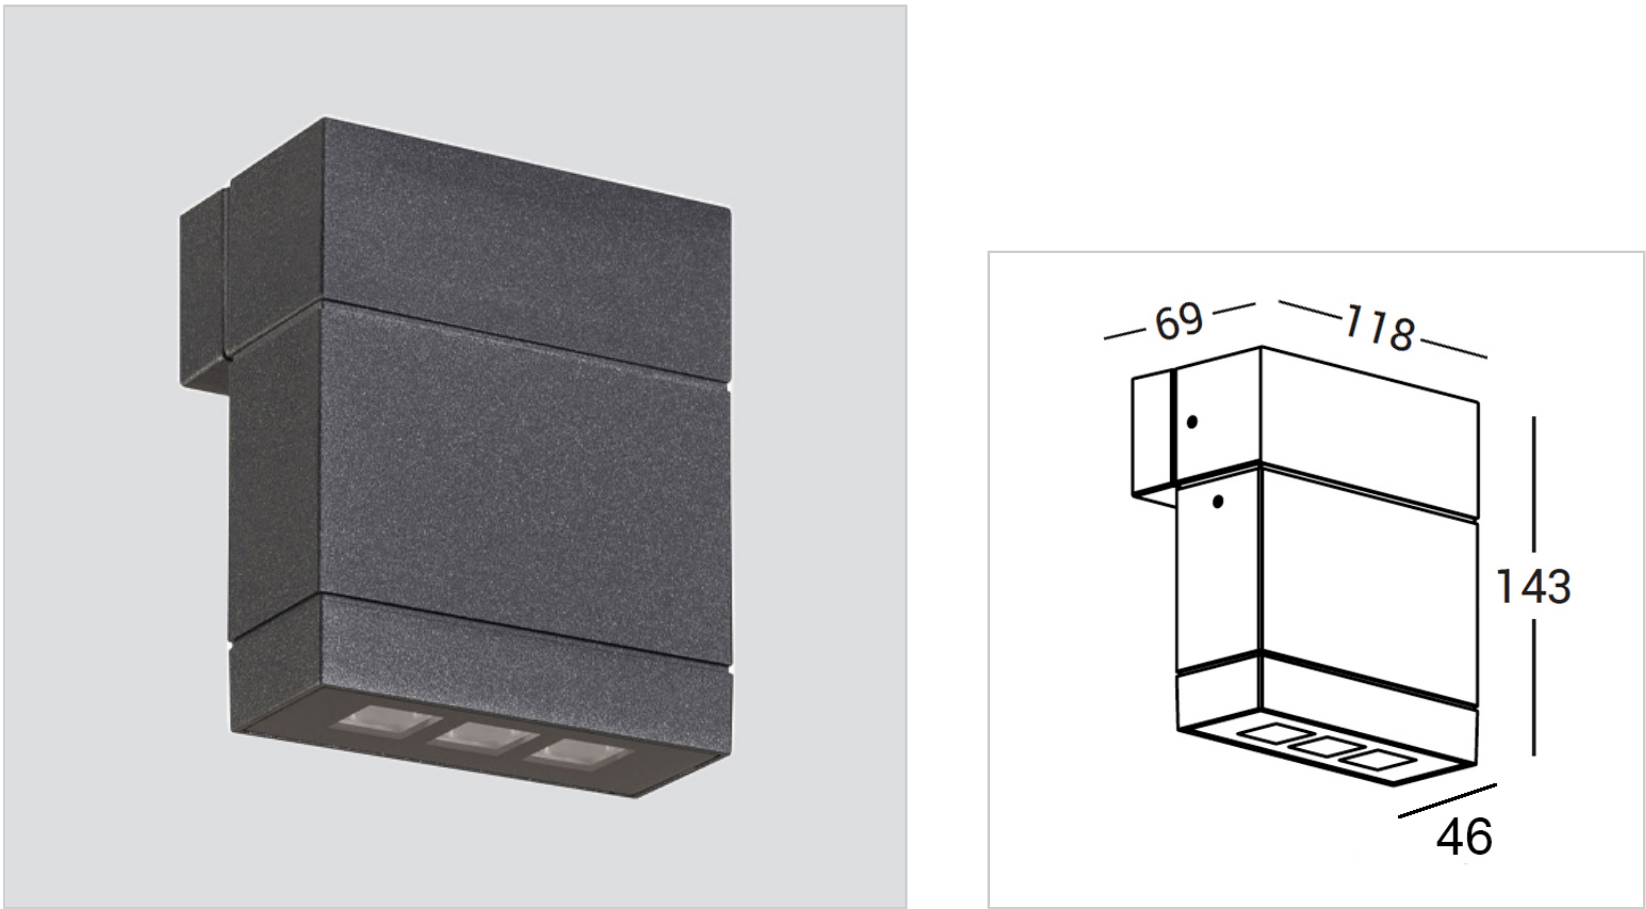

PHOTOMETRICAL DATA

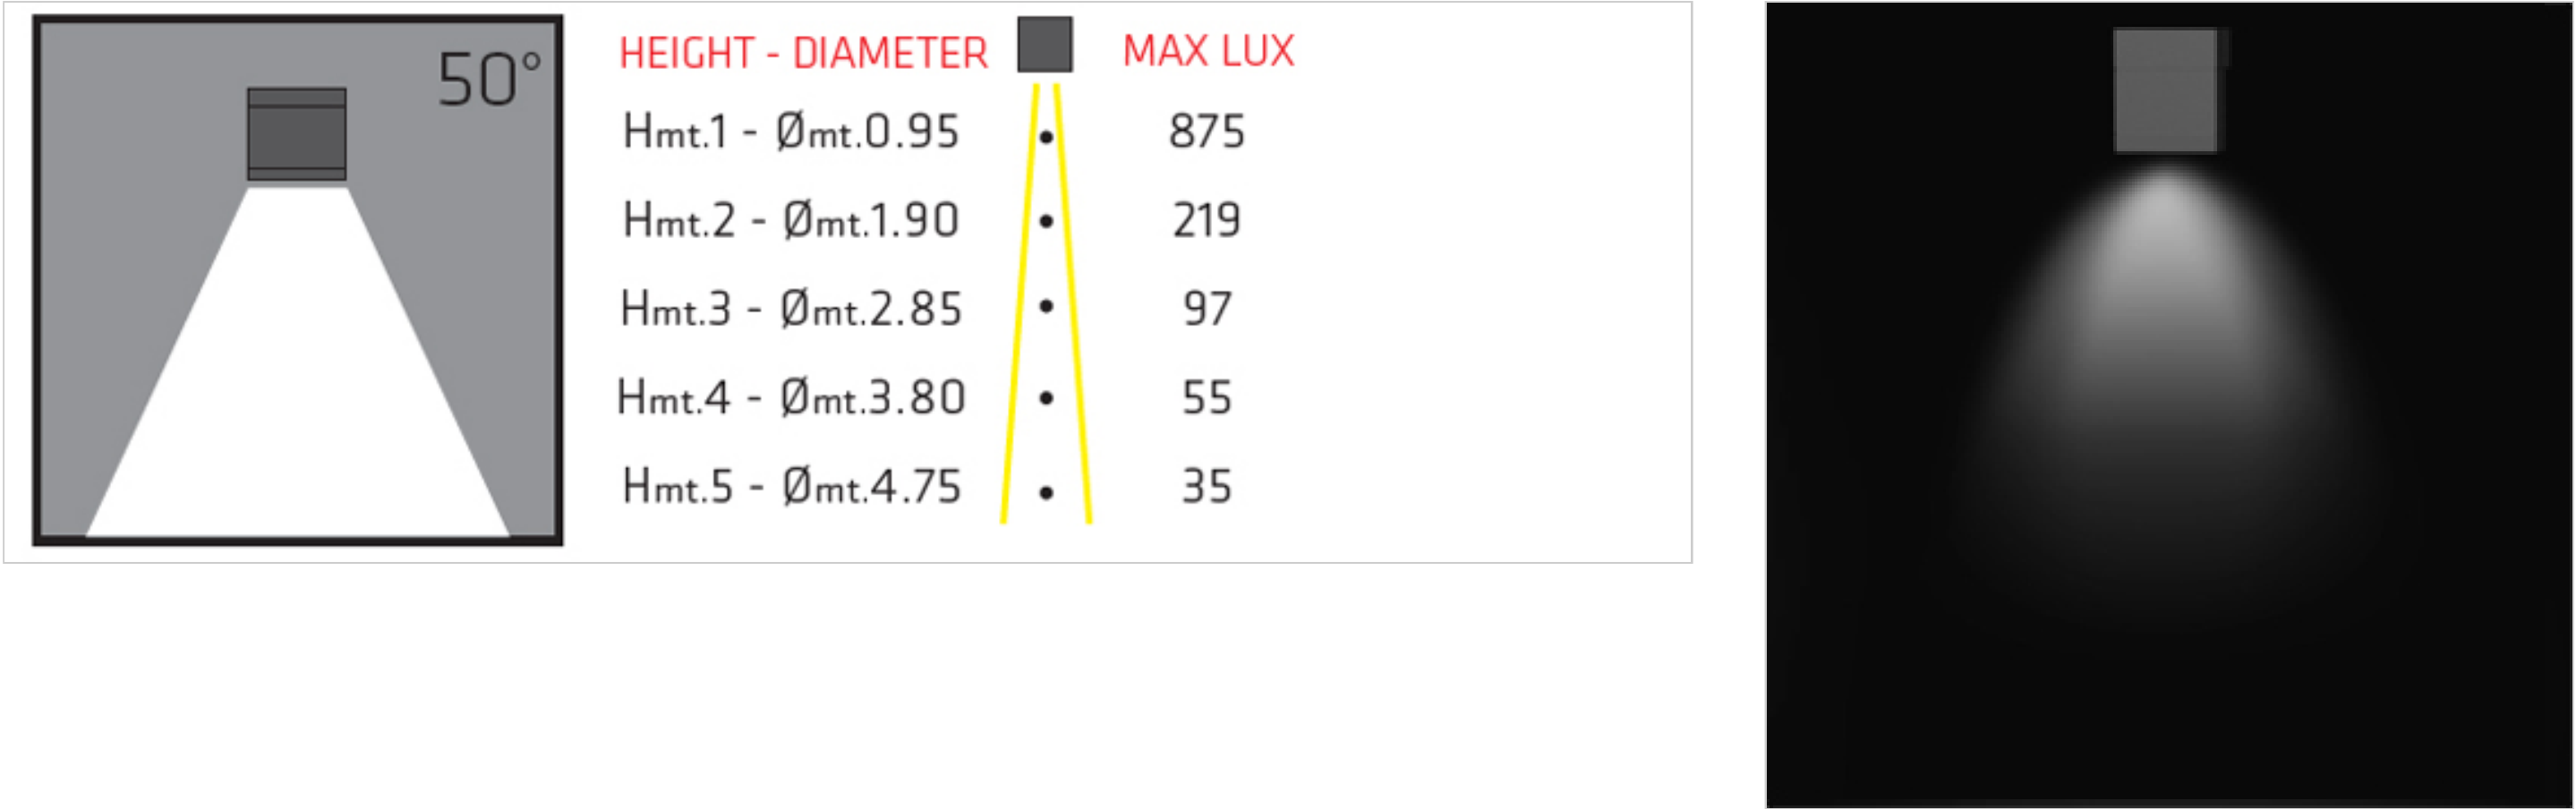

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 143 x L 118 x W 69

ELECTRICAL SPECIFICATIONS

POWER SUPPLY


220-240Vac 50/60Hz

<b>DRIVER</b> Built-in	<b>SOURCE FLUX</b> 750 lm	<b>CCT LED</b> 2700K
<b>DRIVER CURRENT</b> 700mA	<b>FIXTURE SOURCE</b> 610 lm	<b>CRI</b> >80
<b>CONTROL</b> DALI-2 integrated	<b>APPARENT EFFICIENCY</b> 81 %	<b>STEP MACADAM</b> 3
<b>SPECIFIC WIRING</b> Inclusa/Included	<b>INSULATION CLASS</b> I	<b>LIFE TIME TM-21</b> L80B10 80000h Ta 25°C
<b>POWER MODULE LED</b> 6W	<b>OVERVOLTAGE PROTECTION</b> 2kV-4kV	<b>PHOTOBIOLOGICAL RISK</b> RG1
<b>ABSORBED POWER</b> 8W	<b>OPERATING TA</b> 50 °	<b>BEAM OPENING</b> Single/50°
<b>SOURCE</b> LED	<b>ENERGETIC CLASS</b> A	

COLORS

							
<b>00</b> PURE WHITE RAL 9016	<b>01</b> BLACK RAL 9005	<b>10</b> WHITE RAL 9010	<b>24</b> BRONZE	<b>25</b> RUST	<b>30</b> ANTHRACIT E	<b>35</b> SLATE GREY	<b>40</b> GREY RAL 9006

ACCESSORIES

	<b>E.TRA.580</b> Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
---	--