




Modo Bollard 603F1/HP70WB

Small Poles - Bollard Single Emission H. 600


Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions for a bollard system oriented according to the light requirements. Luminaire capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

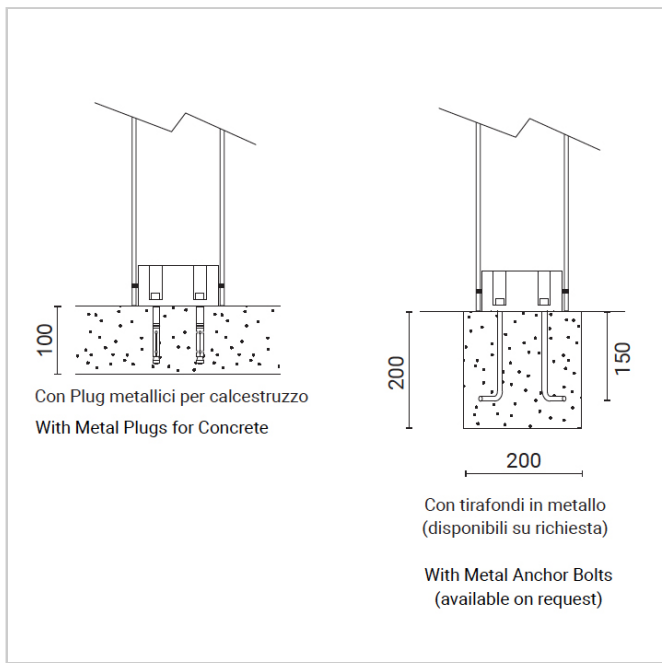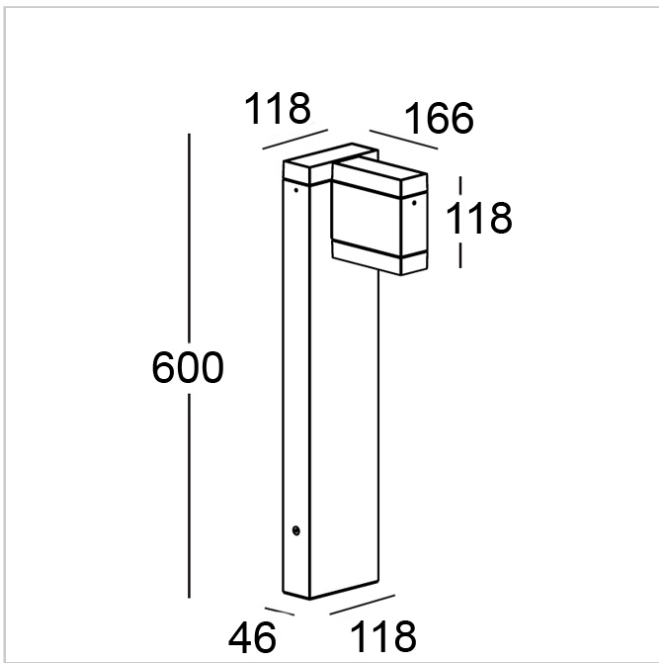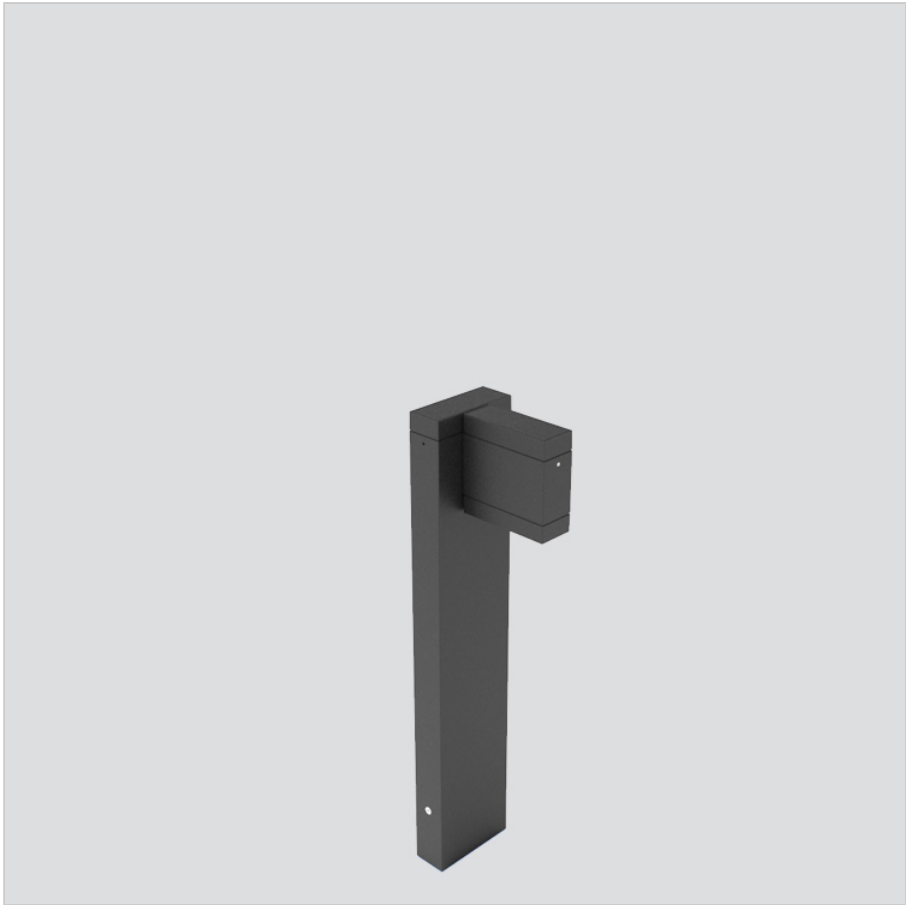

PHOTOMETRICAL DATA

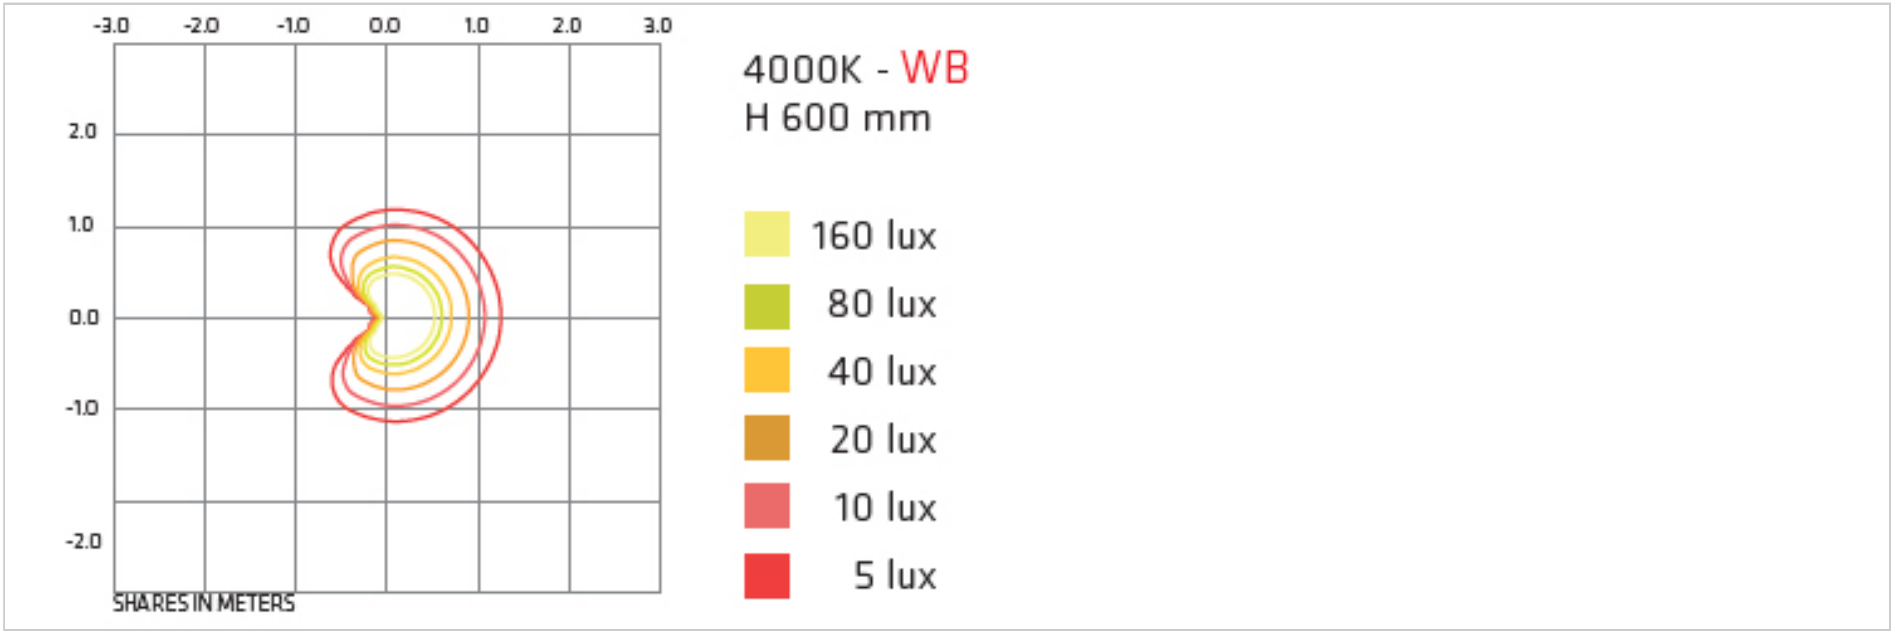

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 600 x L 118 x W 166

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in

DRIVER CURRENT

700mA

CONTROL

ON/OFF

SPECIFIC WIRING

Inclusa/Included

POWER MODULE LED

6W

ABSORBED POWER

8W

SOURCE

LED

SOURCE FLUX

750 lm

FIXTURE SOURCE

326 lm

APPARENT EFFICIENCY

43 %

INSULATION CLASS

I

OVERVOLTAGE PROTECTION

2kV-4kV

OPERATING TA

50 °

ENERGETIC CLASS

A

CCT LED

2700K

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

PHOTOBIOLOGICAL RISK

RG1

BEAM OPENING

Single/50°

COLORS



**00**  
PURE  
WHITE RAL  
9016



**01**  
BLACK RAL  
9005



**10**  
WHITE RAL  
9010



**24**  
BRONZE



**25**  
RUST



**30**  
ANTHRACIT  
E







**35**  
SLATE  
GREY



**40**  
GREY RAL  
9006

ACCESSORIES

	<b>MOR683P/2V</b> Connector IP68 2Way/3Poles L 82 x Ø 28
	<b>MOR685P/3V</b> Connector Y IP68 3Ways/5Poles L 147 x W 73 x H 33
	<b>E.TRA.580</b> Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
	<b>KIT.020</b> Ground anchoring system