


Cut 45 Wall Recessed 4045R/HRRC2L

Wall Recessed - Recessed 2 windows Ø45 - Remote driver 24Vdc

Rev. 20/03/2024



Cut is the new line of steplight with grazing light born to create suggestive light and shadow effects, available in diameters of 45 mm and 70 mm. Design to give life to residential and public walk ways, also available with dedicated wall and ceiling version , making itself almost invisible but keeping light and atmosphere created the main characters of the scene. With one, two or four slots , Cut becomes a perfect fixture for soft or strong effects, for single or series installations. IP67 degree protection combined with AcquaStop system for anti-condensation protection make Cut a reliable and safe product, to inspire light emotions.

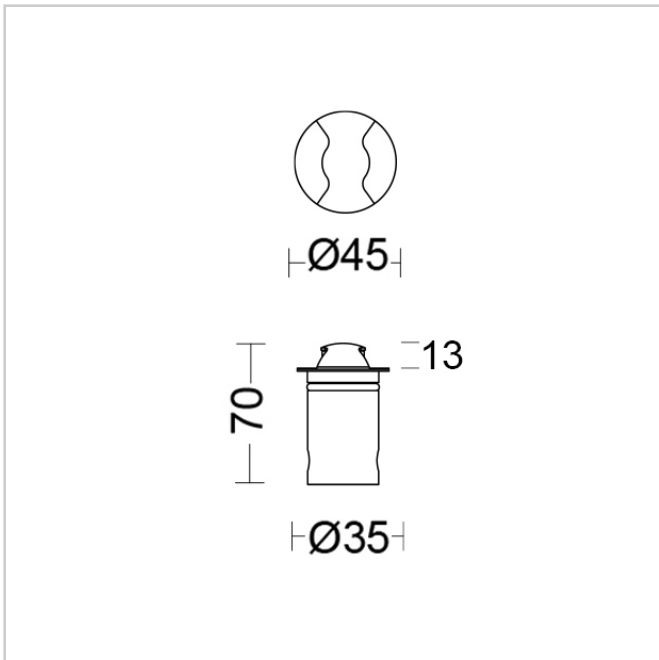

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Inground or wall recessed

PROTECTION

IP 67 - IK 08

BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

BOX

Ploypropylene (PP)30% fiber UVStabilized  
GWT750

SCREEN

Transparent Polycarbonate

SEALS

Closed-cell EPDM rubber

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 70 x Ø 45

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

DRIVER

Remote Driver NOT INCLUDED

DRIVER CURRENT

24Vdc

CONTROL

ON/OFF

ABSORBED POWER

2W

SOURCE

LED

SOURCE FLUX

221 lm

FIXTURE SOURCE

35 lm

APPARENT EFFICIENCY

16 %

INSULATION CLASS

III

OPERATING TA

-20°+ 50°

CCT LED

2700K

CRI

80

STEP MACADAM

3

OPTIK DISTRIBUTION

PMMA Lens

BEAM OPENING












Diffused 2 windows

COLORS

								
<b>00</b> PURE WHITE RAL 9016	<b>01</b> BLACK RAL 9005	<b>10</b> WHITE RAL 9010	<b>24</b> BRONZE	<b>25</b> RUST	<b>30</b> ANTHRACIT E	<b>35</b> SLATE GREY	<b>40</b> GREY RAL 9006	<b>55</b> GREEN COOL MINT RAL 6019

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

	<b>D.BOX.030.01</b> Inground formwork H 100 x Ø 115
	<b>D.BOX.032.01</b> Short formwork H 80 x Ø 40
	<b>E.CAV.540.020</b> Cable H05RN-F L 2 mt
	<b>E.CAV.540.050</b> Cable H05RN-F L 5 mt
	<b>E.CAV.540.100</b> Cable H05RN-F L 10 mt
	<b>MOR682P/2V</b> Connector IP68 2Ways/2Poles L 72 x Ø 22
	<b>E.TRA.631</b> Driver 15W 24Vdc IP20 - ON/OFF L 106 x W 33 x H 22 - 1 Driver for 1-5 Lamps
	<b>E.TRA.632</b> Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-25 Lamps
	<b>E.TRA.577</b> Driver 25W 24Vdc IP67 - ON/OFF L 14 8x W 40 x H 32 - 1 Driver for 1-8 Lamps
	<b>E.TRA.579</b> Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 9-30 Lamps
	<b>HUB.24V.001.ND</b> Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps