

IN-Libra 900

Product code


ILB09ANX231NWS



Features

IP rating	IP66/67
IK rating	08
Source type	High power LED
LED number	72
CRI	80
Step McAdam	3
Source life time	>110.000h L70 B10 at 25°C ambient temperature
Source flux	5265 lm
Source efficiency	166,7 lm/W
Delivered flux	4120 lm
Delivered efficiency	112,1 lm/W
Input power	36,5W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	4000 K
Beam angle	wide asymmetrical
Mounting	ground-recessed
Finishing	silver anodized
Net weight	3,5kg

Technical drawing

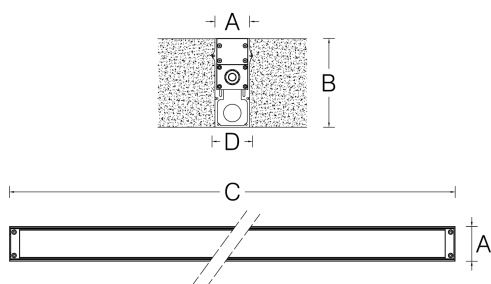

Dimensions

A	49mm	B	125mm
C	928mm	D	58mm

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C

Construction

extruded aluminium alloy, silicone sealing, tempered extra-clear sodium-calcium front glass, nickel-plated brass cable gland, pressure compensation valve

Light control

On/off control, no dimming.

Connection

Through-wiring, power supply cable length 0,08m with IP68 4-poles connectors

Protections

short circuit, overload, overvoltage, thermal (shut off)


Specifications





Photometry

wide asymmetrical




4000 K	0.5 m	14,5 Klux
3,62 Kcd	1 m	3,6 Klux
4,12 Klm	2 m	905 lux
36	5 m	145 lux
	10 m	36 lux

IN-Libra 900

Product code

ILB09ANX231NWS

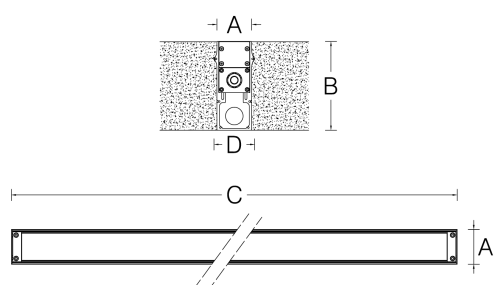Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	49mm	B	125mm
C	928mm	D	58mm