



Modo Floodlight 611W1/ND70BB

Floodlights - Module DALI Horizontal Emission

Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions. Able to be a projector, vertically or horizontally, adjustable according to the light requirements. Modo offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

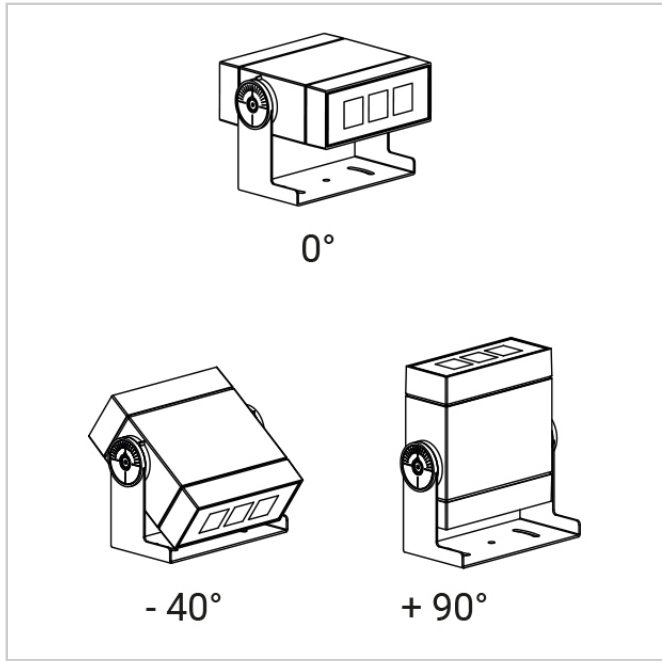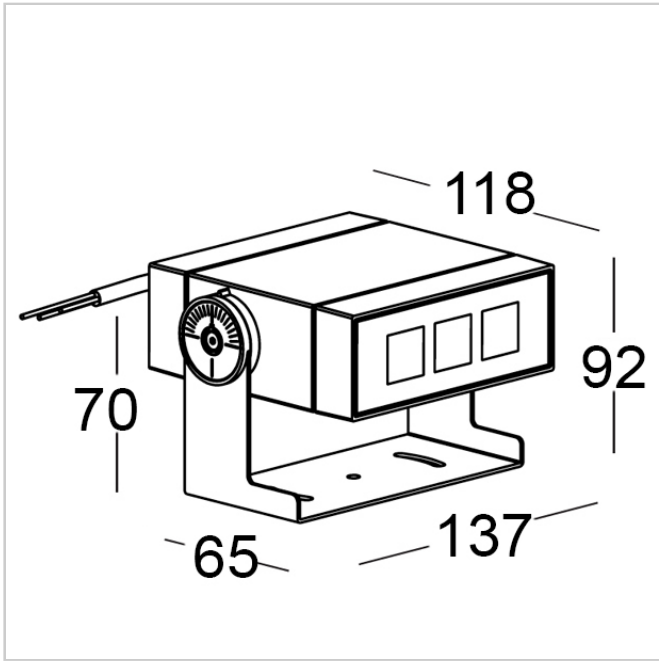

PHOTOMETRICAL DATA

	HEIGHT - DIAMETER		MAX LUX
	Hmt.1 - Ømt.0.15	•	890
	Hmt.2 - Ømt.0.30	•	222
	Hmt.3 - Ømt.0.44	•	99
	Hmt.4 - Ømt.0.59	•	56
	Hmt.5 - Ømt.0.74	•	36

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall, ceiling and stand installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 92 x L 137 x W 118

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in







DRIVER CURRENT

700mA	<b>FIXTURE SOURCE</b> 278 lm	<b>CCT LED</b> 4000K
<b>CONTROL</b> DALI-2 integrated	<b>APPARENT EFFICIENCY</b> 93 %	<b>CRI</b> >80
<b>SPECIFIC WIRING</b> Inclusa/Included	<b>INSULATION CLASS</b> I	<b>STEP MACADAM</b> 3
<b>POWER MODULE LED</b> 2W	<b>OVERVOLTAGE PROTECTION</b> 2kV-4kV	<b>LIFE TIME TM-21</b> L80B10 80000h Ta 25°C
<b>ABSORBED POWER</b> 3.5W	<b>OPERATING TA</b> 50 °	<b>PHOTOBIOLOGICAL RISK</b> RG1
<b>SOURCE</b> LED	<b>ENERGETIC CLASS</b> A	<b>BEAM OPENING</b> Single Straight Blade/4°
<b>SOURCE FLUX</b> 300 lm		

COLORS

							
<b>00</b> PURE WHITE RAL 9016	<b>01</b> BLACK RAL 9005	<b>10</b> WHITE RAL 9010	<b>24</b> BRONZE	<b>25</b> RUST	<b>30</b> ANTHRACIT E	<b>35</b> SLATE GREY	<b>40</b> GREY RAL 9006

ACCESSORIES

	<b>E.CAV.538.020</b> L 2 mt	Cable H05BQ-F
	<b>E.CAV.538.050</b> L 5 mt	Cable H05BQ-F
	<b>E.CAV.538.100</b> L 10 mt	Cable H05BQ-F
	<b>MOR685P/2V</b> L 115 x Ø 34	Connector IP68 2Ways/5Poles
	<b>MOR685P/3V</b> L 147 x W 73 x H 33	Connector Y IP68 3Ways/5Poles
	<b>E.TRA.580</b> L 37 x W 30 x H 30	Ultra compact type 2+3 hard wired surge protector