



Modo Bollard 604F2/WD70A2

Small Poles – Bollard DALI Double Emission H. 1000


Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions for a bollard system oriented according to the light requirements. Luminaire capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

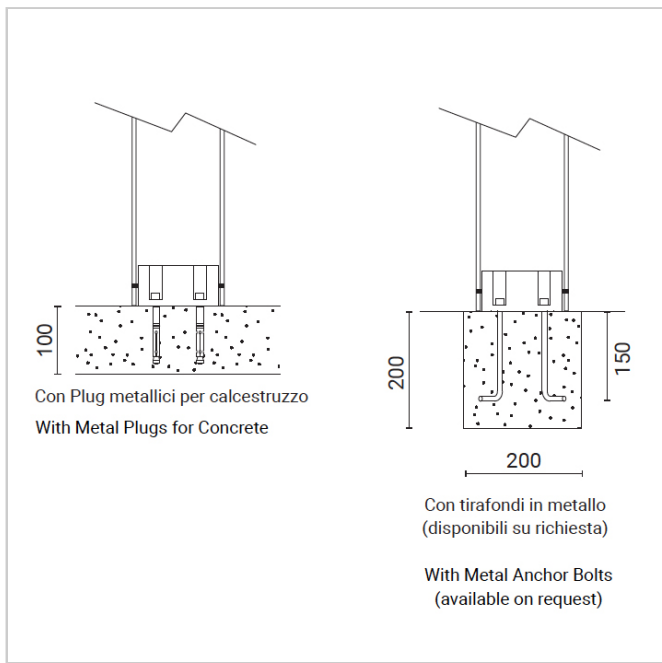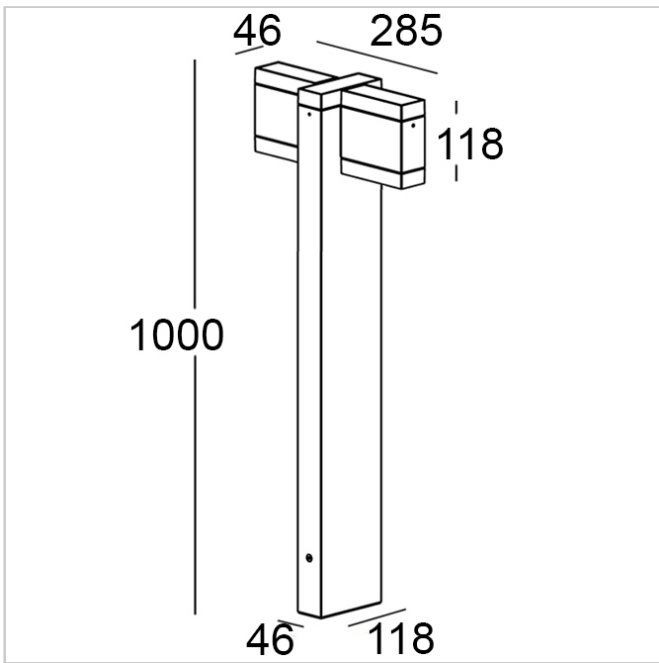

PHOTOMETRICAL DATA

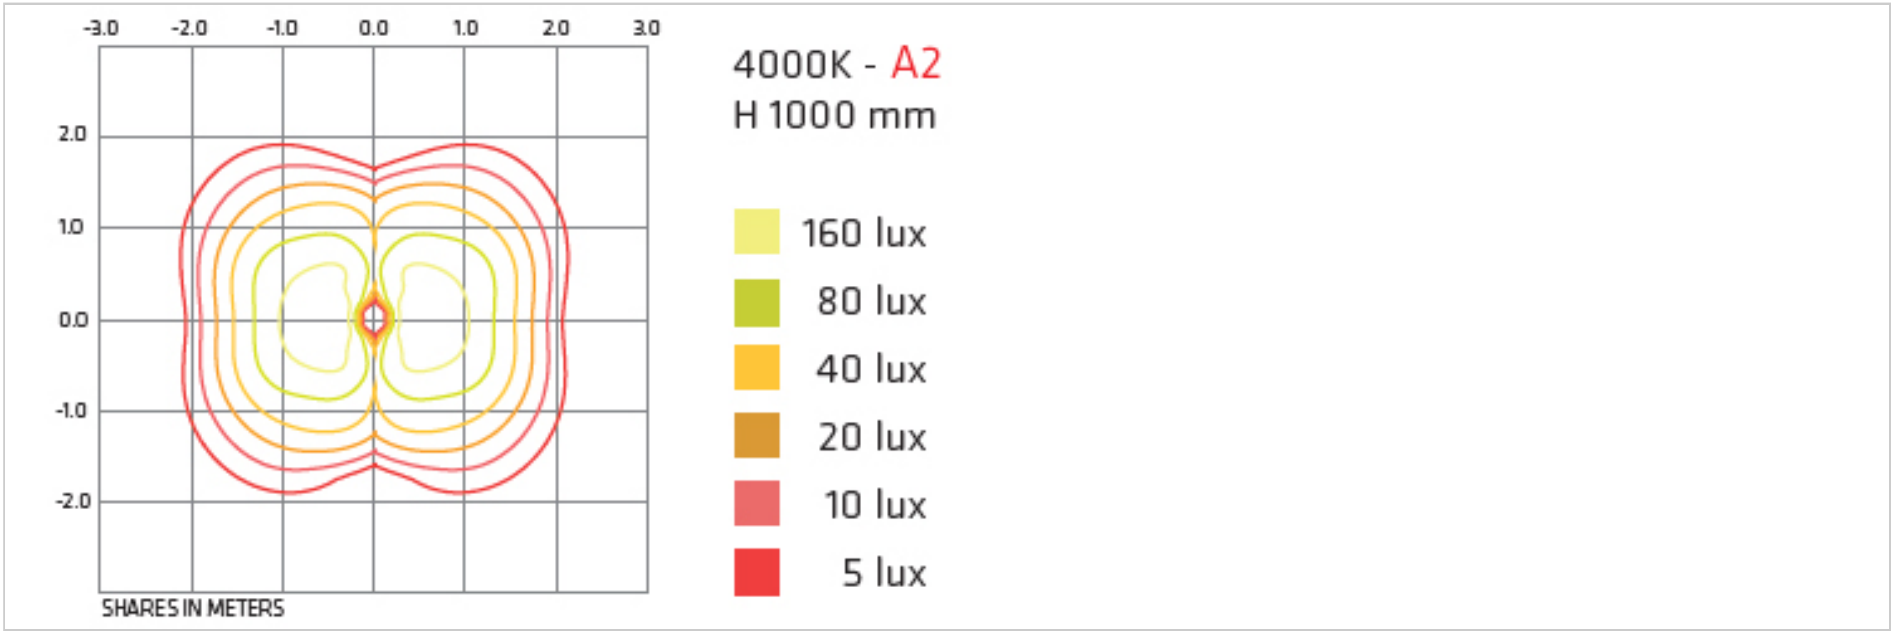

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 65 – IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 1000 x L 118 x W 286

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in

DRIVER CURRENT

700mA

CONTROL

DALI-2 integrated

SPECIFIC WIRING

Inclusa/Included

POWER MODULE LED

12W

ABSORBED POWER

16W

SOURCE

LED

SOURCE FLUX

1580 lm

FIXTURE SOURCE

873 lm

APPARENT EFFICIENCY

55 %

INSULATION CLASS

I

OVERVOLTAGE PROTECTION

2kV-4kV

OPERATING TA

50 °

ENERGETIC CLASS

A

CCT LED

3000K

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C


PHOTOBIOLOGICAL RISK

RG1


BEAM OPENING

Dual/Asymmetric

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE




25
RUST



30
ANTHRACIT
E





35
SLATE
GREY



40
GREY RAL
9006

ACCESSORIES

	E.CAV.538.020 L 2 mt	Cable H05BQ-F
	E.CAV.538.050 L 5 mt	Cable H05BQ-F
	E.CAV.538.100 L 10 mt	Cable H05BQ-F
	MOR685P/2V L 115 x Ø 34	Connector IP68 2Ways/5Poles
	MOR685P/3V L 147 x W 73 x H 33	Connector Y IP68 3Ways/5Poles
	E.TRA.580 L 37 x W 30 x H 30	Ultra compact type 2+3 hard wired surge protector
	KIT.020	Ground anchoring system