Augenti®


Vega 2700W/WC35.NB

Floodlights - Adjustable Floodlight - Built-in driver



Adjustable fixture suitable for wall, ceiling or floor installation as a stand-alone projector or with spike support. Equipped with secondary optics for different light distributions, it is composed of an insulating base (or picket) in PC that allows you to install the luminaire directly on the ground without oxidation phenomena. All versions integrate a quick rotation/adjustment system on the horizontal plane by means of a toothed ring nut, without resorting to the aid of any tools. LED source with built-in driver. Dali dimmable version available on request with extra charge.



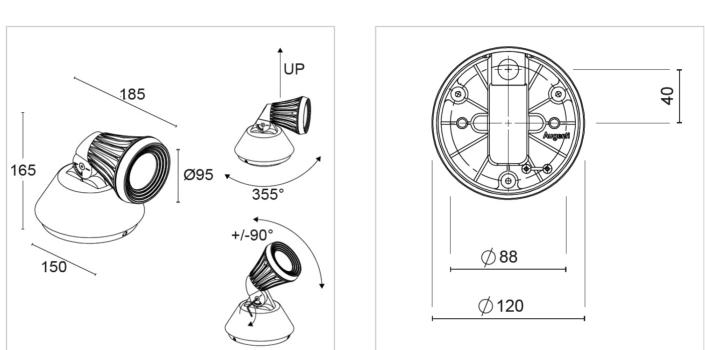

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

FRAME

SCREWS

Rev. 31/10/2023

Wall, ceiling and stand installation

PROTECTION

IP 65 - IK 07

BODY

Body: Die-cast aluminum - Base: Fiberreinforced polyamide 30% UV resistant GW960 ° C Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silkscreen printing

SEALS Closed-cell EPDM rubber

Stainless steel A2

PAINT / FINISHING Anti-corrosive UV stabilised polyester powder

SIZES

H 165 x W 185 x Ø base 150

NET WEIGHT 1,08 Kg


ELECTRICAL SPECIFICATIONS

POWER SUPPLY	SOURCE FLUX	CCT LED
220-240Vac 50/60Hz	1835 Im	3000K
DRIVER	FIXTURE SOURCE	CRI
Built-in	1288 lm	>80
DRIVER CURRENT	APPARENT EFFICIENCY	STEP MACADAM
350mA	70 %	3
CONTROL ON/OFF	INSULATION CLASS	LIFE TIME TM-21 L80B10 80000h Ta 25°C
POWER MODULE LED	OVERVOLTAGE PROTECTION	PHOTOBIOLOGICAL RISK
12W	2kV-2kV	RG1
ABSORBED POWER	OPERATING TA	BEAM OPENING
14W	50 °	Adjustable Floodlight Spot/18°
SOURCE LED	ENERGETIC CLASS A	

COLORS



ACCESSORIES

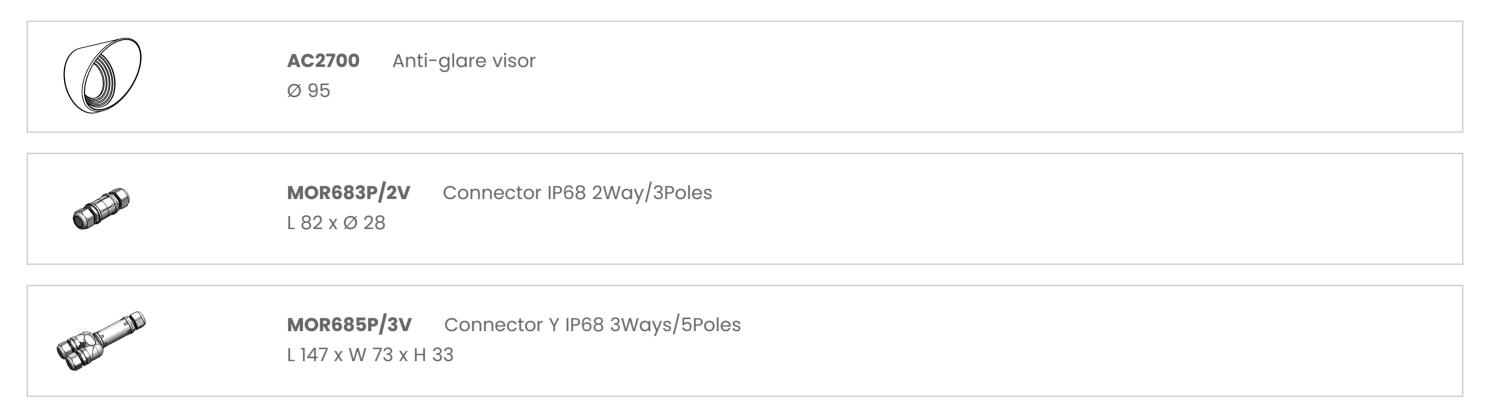

2025 © Augenti Lighting Srl - Via Francesco Lana 31, Lumezzane (BS) - Tel. (+39) 030 7282524 - info@augentilighting.it - www.augentilighting.it