



Pong 1500

Product code


POG15ANR048NWOD



Features

IP rating	IP66/67
Source type	Mid power LED
LED number	294
CRI	80
Step McAdam	3
Source life time	>110.000h L70 B10 at 25°C ambient temperature
Source flux	2905 lm
Source efficiency	121,2 lm/W
Delivered flux	1660 lm
Delivered efficiency	69,1 lm/W
Input power	24W
Voltage	48 VDC
Insulation class	insulation class III
Power supply	Power supply remote, constant voltage
Management interface	on/off, optional dimming (via accessories)
Light colour/CCT	4000 K
Beam angle	120°
Mounting	surface
Finishing	silver anodized
Net weight	1,65kg

Technical drawing

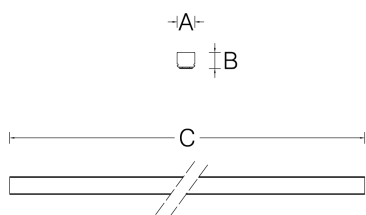

Temperature limits

Working temperature	from -30°C to +55°C
Storage temperature	from -50°C to +80°C

Construction

extruded aluminum alloy, polyurethane resin and plastic cover

Light control

Control and dimming by means of constant voltage control accessories


Connection

Through-wiring, power supply cable length 0,15m with IP68 4-poles connectors

Protections

reverse polarity

Specifications




Dimensions

A	25mm	B	23mm
C	1500mm		

Photometry

120°



4000 K	0.2 m	14,8 Klux
592,79 cd	0.5 m	2,4 Klux
1,66 Klm	1 m	593 lux
24	2 m	148 lux
	5 m	24 lux


Lighting effects



Pong 1500

Product code

POG15ANR048NWOD

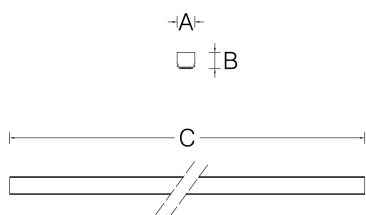Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	25mm	B	23mm
C	1500mm		