



Up&Down Wall 7500W/HD3.WB

Wall - Wall luminaire DALI Double Emission - Built-in driver


Rev. 04/11/2024



Wall luminaire configurable in single and double emission, ideal for grazing lighting of external facades. Up&Downd is equipped with various secondary optics for controlling the light flow, which allow design flexibility through different combinations of direct and indirect emission.

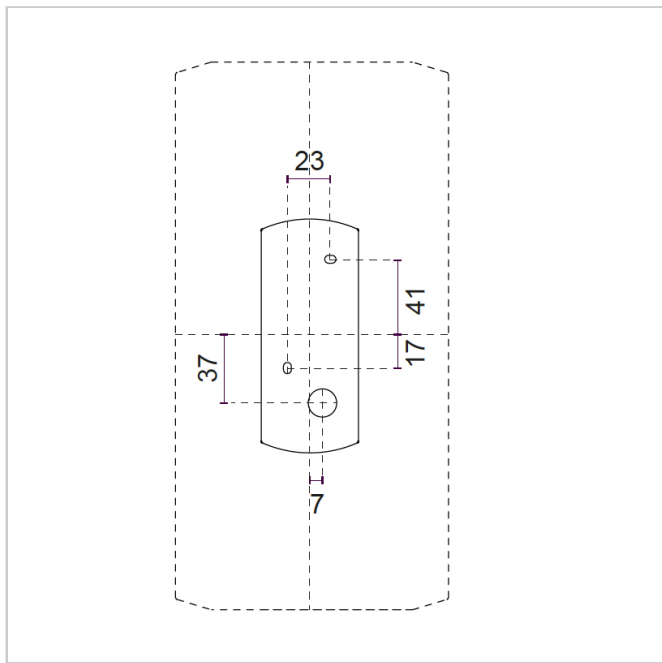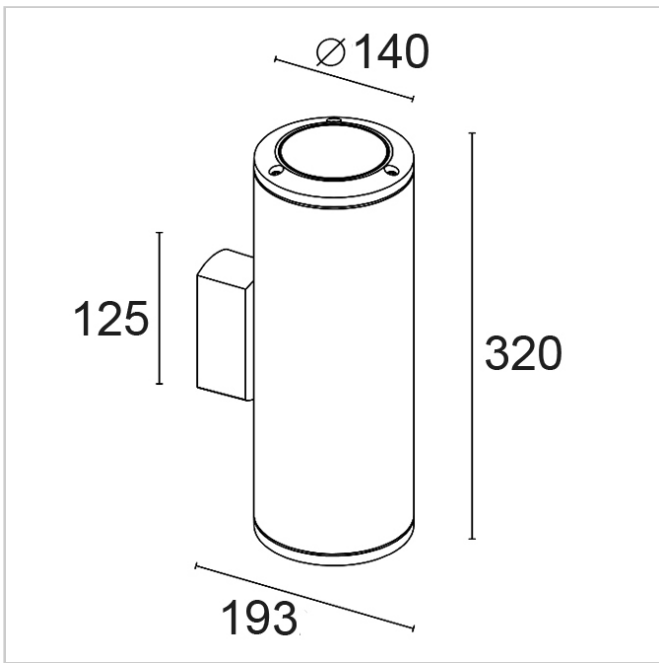

PHOTOMETRICAL DATA

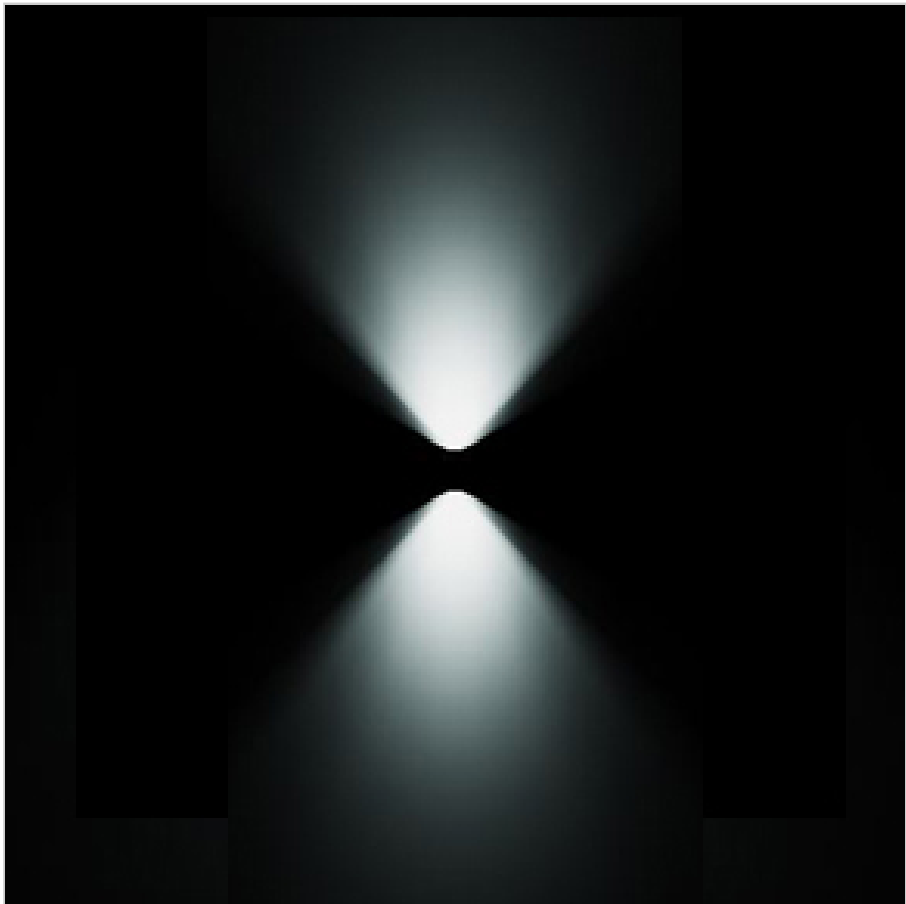

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 66 - IK 08

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 6mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 320 x W 193 x Ø 140

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER


|                                     |  |   |
|-------------------------------------|--|---|
| Built-in                            | <b>SOURCE FLUX</b><br>3661 lm            | <b>CCT LED</b><br>2700K                         |
| <b>DRIVER CURRENT</b><br>800mA      | <b>FIXTURE SOURCE</b><br>3036 lm         | <b>CRI</b><br>>80                               |
| <b>CONTROL</b><br>DALI-2 integrated | <b>APPARENT EFFICIENCY</b><br>83 %       | <b>STEP MACADAM</b><br>3                        |
| <b>POWER MODULE LED</b><br>32W      | <b>INSULATION CLASS</b><br>I             | <b>LIFE TIME TM-21</b><br>L80B10 80000h Ta 25°C |
| <b>ABSORBED POWER</b><br>34W        | <b>OVERVOLTAGE PROTECTION</b><br>2kV-4kV | <b>PHOTOBIOLOGICAL RISK</b><br>RG0              |
| <b>SOURCE</b><br>LED COB            | <b>OPERATING TA</b><br>50 °              | <b>BEAM OPENING</b><br>Dual Wide Flood/56°+56°  |

COLORS

|   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| <b>00</b><br>PURE<br>WHITE RAL<br>9016  | <b>01</b><br>BLACK RAL<br>9005  | <b>10</b><br>WHITE RAL<br>9010  | <b>24</b><br>BRONZE   | <b>25</b><br>RUST   | <b>30</b><br>ANTHRACIT<br>E   | <b>35</b><br>SLATE<br>GREY  | <b>40</b><br>GREY RAL<br>9006   |

This product is also available with traditional electrifications. Contact us for more information.

ACCESSORIES

|   |  |
|---|--|
|  | <b>E.TRA.580</b> Ultra compact type 2+3 hard wired surge protector<br>L 37 x W 30 x H 30 |
|---|--|