



Modo Floodlight 611W1/HD70BB

Floodlights - Module DALI Horizontal Emission

Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions. Able to be a projector, vertically or horizontally, adjustable according to the light requirements. Modo offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

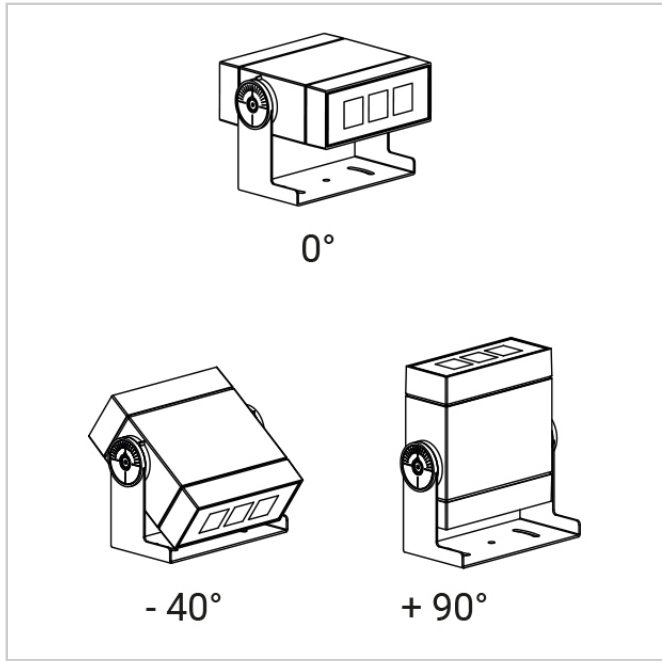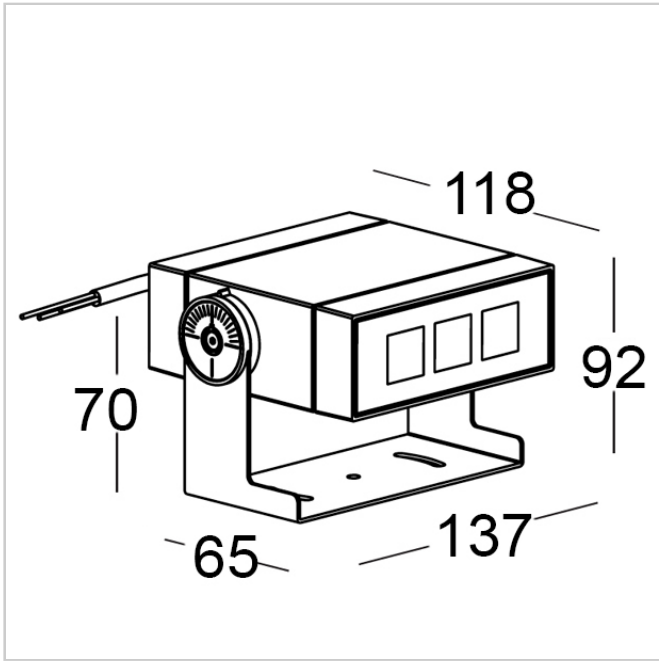

PHOTOMETRICAL DATA

	HEIGHT - DIAMETER		MAX LUX
	Hmt.1 - Ømt.0.15	•	890
	Hmt.2 - Ømt.0.30	•	222
	Hmt.3 - Ømt.0.44	•	99
	Hmt.4 - Ømt.0.59	•	56
	Hmt.5 - Ømt.0.74	•	36

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall, ceiling and stand installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 92 x L 137 x W 118

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in







DRIVER CURRENT

700mA	FIXTURE SOURCE 225 lm	CCT LED 2700K
CONTROL DALI-2 integrated	APPARENT EFFICIENCY 91 %	CRI >80
SPECIFIC WIRING Inclusa/Included	INSULATION CLASS I	STEP MACADAM 3
POWER MODULE LED 2W	OVERVOLTAGE PROTECTION 2kV-4kV	LIFE TIME TM-21 L80B10 80000h Ta 25°C
ABSORBED POWER 3.5W	OPERATING TA 50 °	PHOTOBIOLOGICAL RISK RG1
SOURCE LED	ENERGETIC CLASS A	BEAM OPENING Single Straight Blade/4°
SOURCE FLUX 247 lm		

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES

	E.CAV.538.020 L 2 mt	Cable H05BQ-F
	E.CAV.538.050 L 5 mt	Cable H05BQ-F
	E.CAV.538.100 L 10 mt	Cable H05BQ-F
	MOR685P/2V L 115 x Ø 34	Connector IP68 2Ways/5Poles
	MOR685P/3V L 147 x W 73 x H 33	Connector Y IP68 3Ways/5Poles
	E.TRA.580 L 37 x W 30 x H 30	Ultra compact type 2+3 hard wired surge protector