


Modo Wall 602W1/WP70WB

Wall - Double Module Double Emission


Rev. 04/11/2024




A simple parallelepiped, with a minimal line and compact dimensions, capable of being wallwashers, vertically or horizontally, oriented according to the light requirements. It also offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

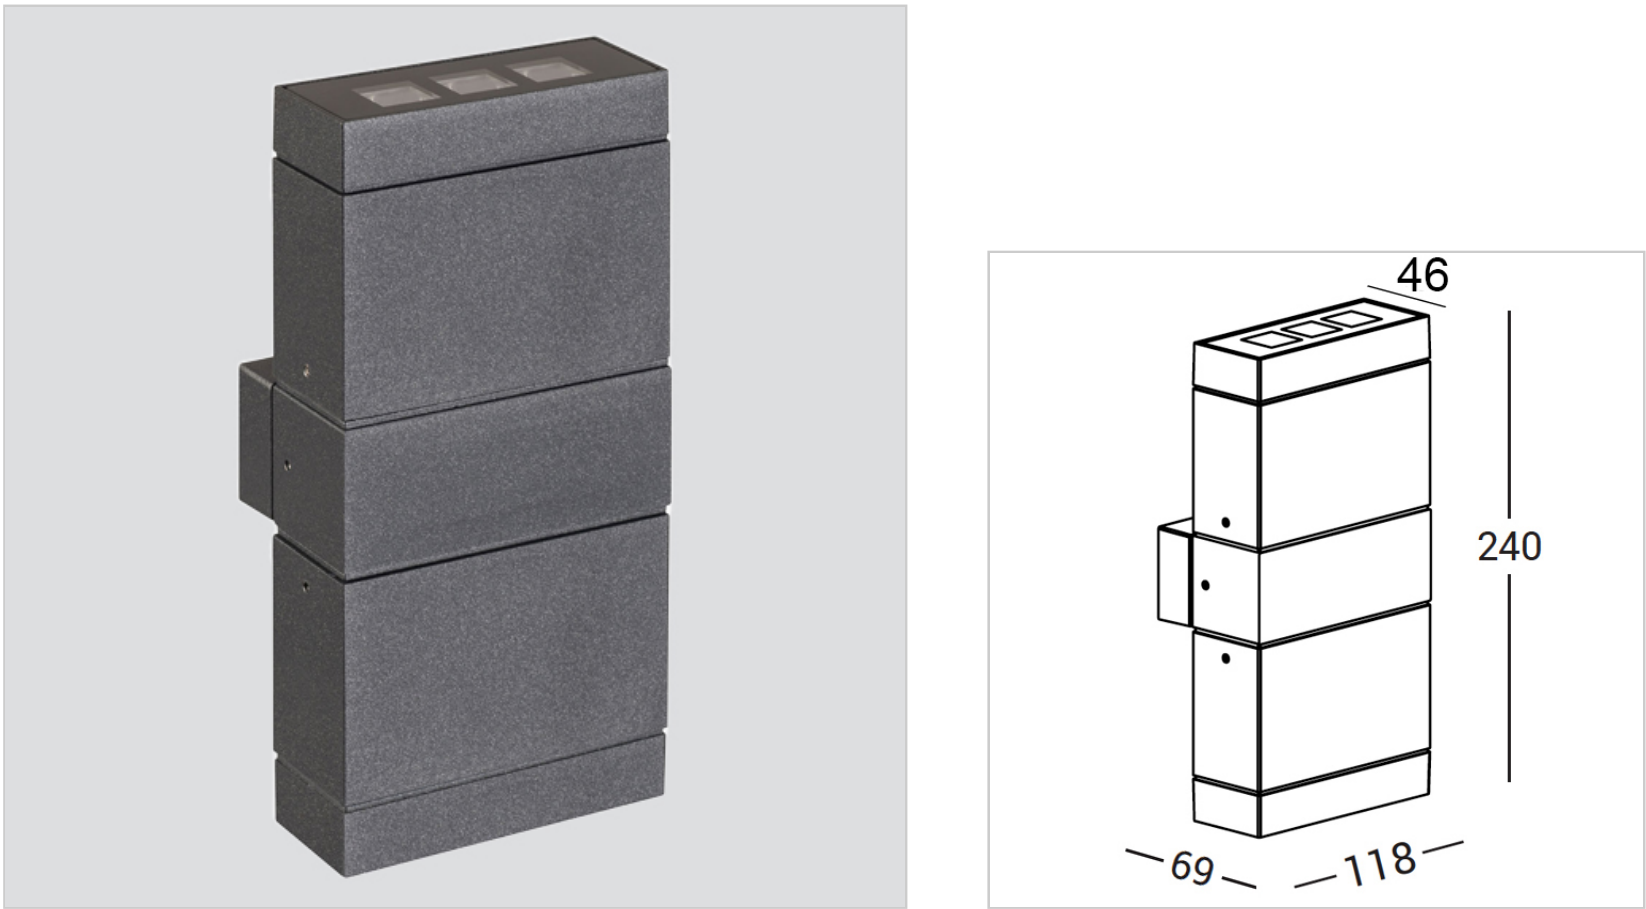

PHOTOMETRICAL DATA

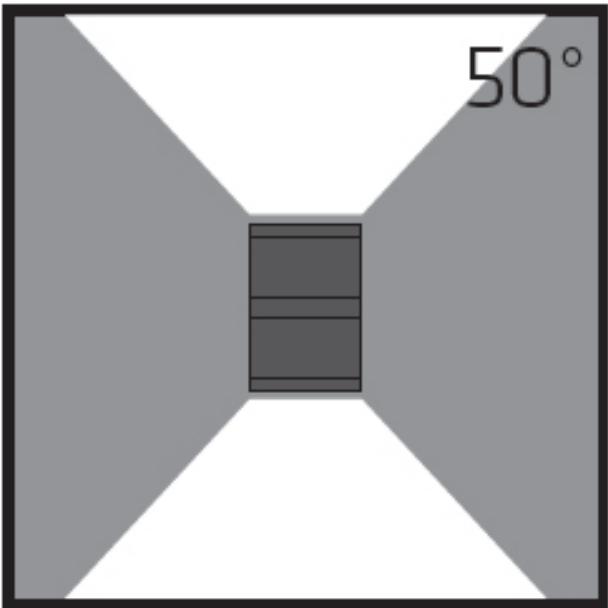

HEIGHT - DIAMETER		MAX LUX
Hmt.1 - Ømt.0.95	•	875
Hmt.2 - Ømt.1.90	•	219
Hmt.3 - Ømt.2.85	•	97
Hmt.4 - Ømt.3.80	•	55
Hmt.5 - Ømt.4.75	•	35

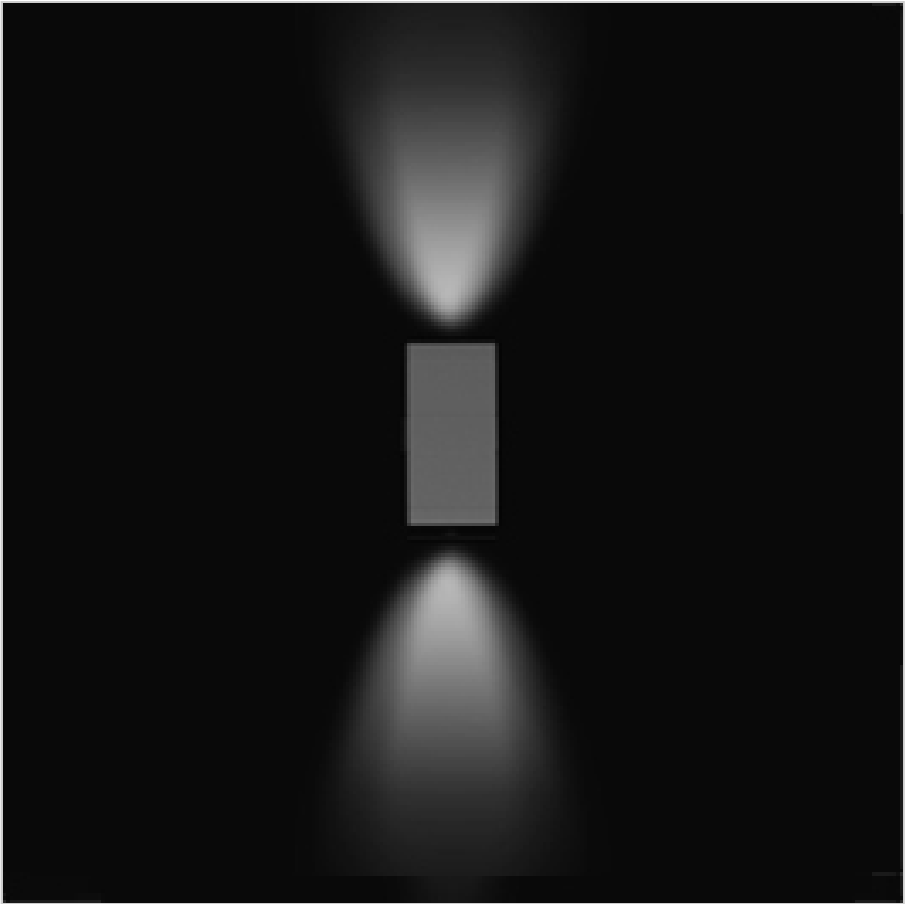

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 240 x L 118 x W 69

ELECTRICAL SPECIFICATIONS

POWER SUPPLY


220-240Vac 50/60Hz

DRIVER Built-in	SOURCE FLUX 1580 lm	CCT LED 3000K
DRIVER CURRENT 700mA	FIXTURE SOURCE 1286 lm	CRI >80
CONTROL ON/OFF	APPARENT EFFICIENCY 81 %	STEP MACADAM 3
SPECIFIC WIRING Inclusa/Included	INSULATION CLASS I	LIFE TIME TM-21 L80B10 80000h Ta 25°C
POWER MODULE LED 12W	OVERVOLTAGE PROTECTION 2kV-4kV	PHOTOBIOLOGICAL RISK RG1
ABSORBED POWER 16W	OPERATING TA 50 °	BEAM OPENING Dual/50°
SOURCE LED	ENERGETIC CLASS A	

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES

	E.TRA.580 Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
---	--