



Up&Down Mini Wall 7550W/NC0.MB

Wall - Wall luminaire Double Emission - Built-in driver


Rev. 28/03/2024



Wall luminaire configurable in single and double emission, ideal for grazing lighting of external facades. Up & Downd mini is equipped with various secondary optics for controlling the light flow, which allow design flexibility through different combinations of direct and indirect emission. The device includes the use of LED sources with built-in driver with fixed or dimmable Dali output on request with a surcharge.

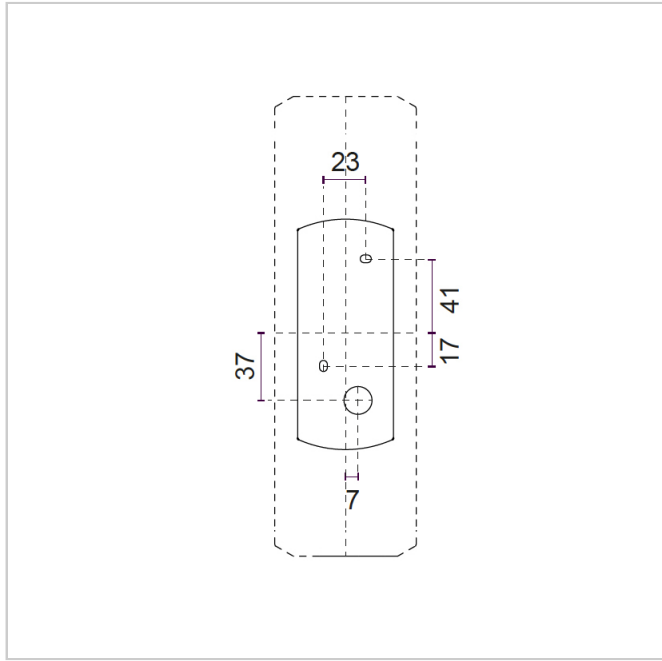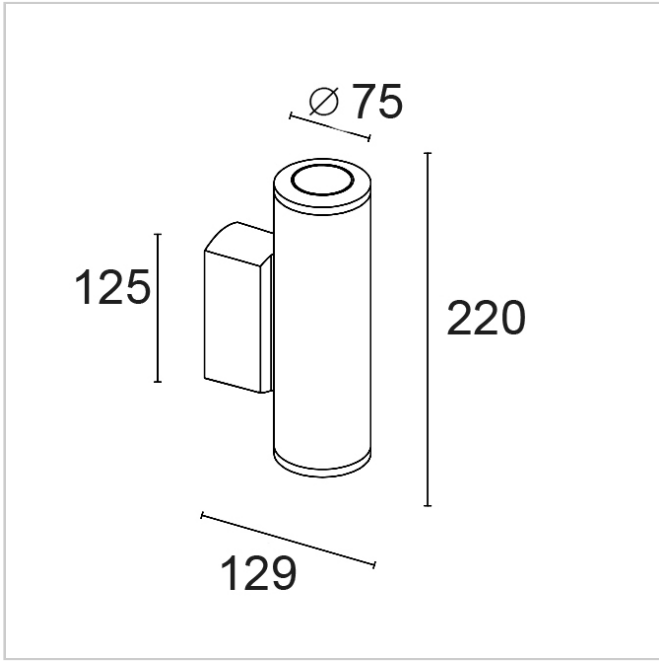

PHOTOMETRICAL DATA

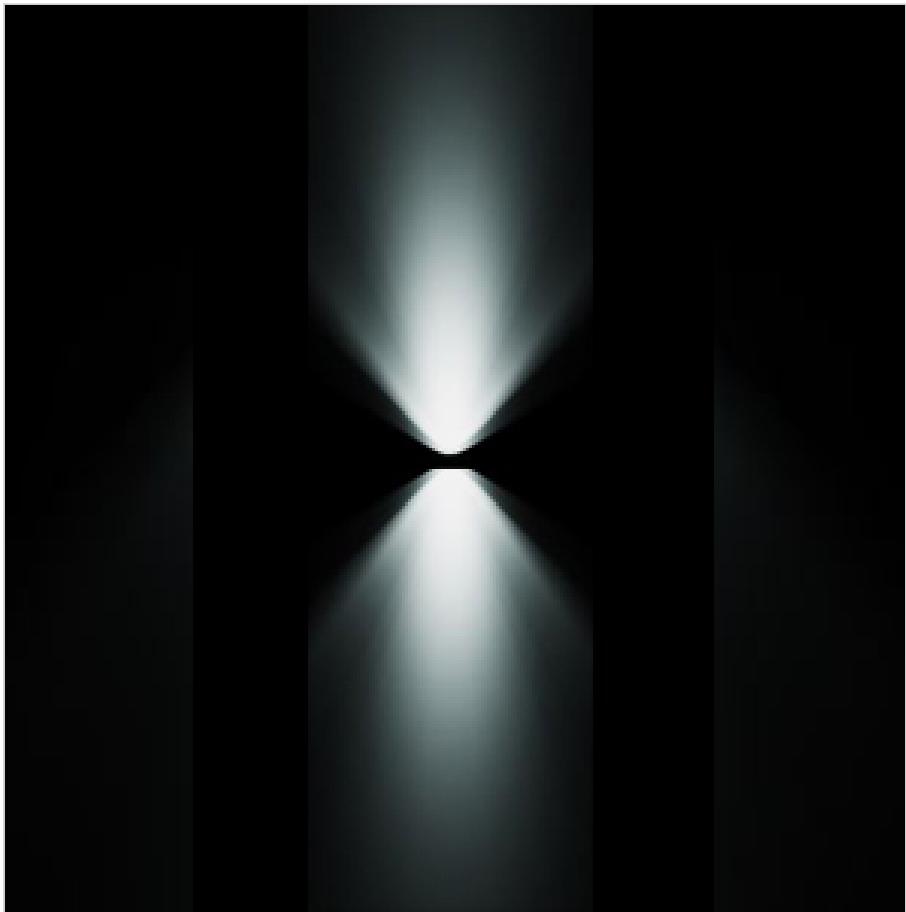

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 65 - IK 08

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 6mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 220 x W 129 x Ø 75

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER CURRENT

350mA

CONTROL

ON/OFF

POWER MODULE LED

14W

ABSORBED POWER

16W

SOURCE

LED

SOURCE FLUX

1650 lm

FIXTURE SOURCE

1504 lm

APPARENT EFFICIENCY

91 %

INSULATION CLASS

I

OPERATING TA

50 °

CCT LED

4000K

CRI

>80

STEP MACADAM

3

PHOTOBIOLOGICAL RISK

RG1

BEAM OPENING

Dual Flood/26°+26°

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE



25
RUST



30
ANTHRACIT
E




35
SLATE
GREY



40
GREY RAL
9006

This product is also available with traditional electrifications. Contact us for more information.

ACCESSORIES



E.TRA.580 Ultra compact type 2+3 hard wired surge protector

L 37 x W 30 x H 30