

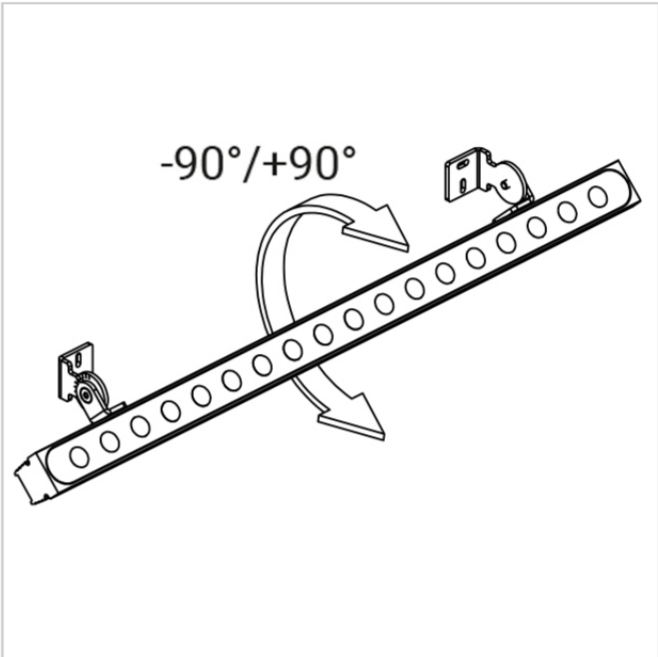
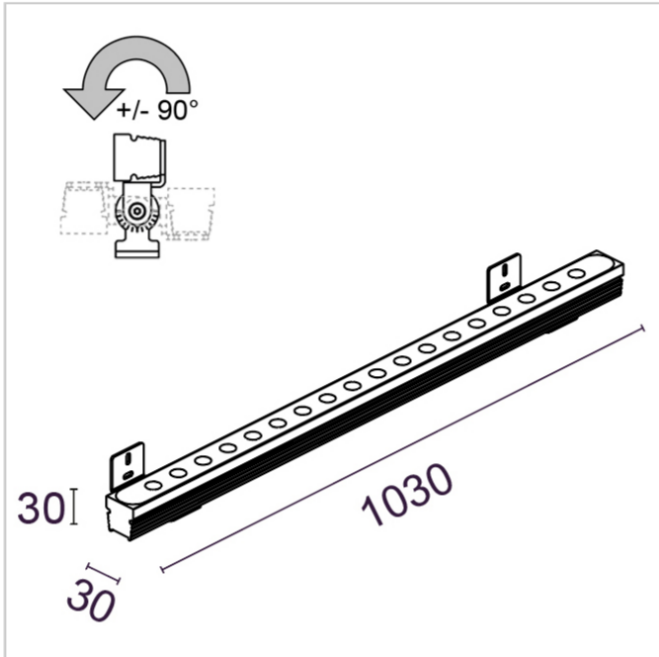
Matrix Mini Floodlight 2813P/HPRCOB

Floodlights - Floodlight with Lens L. 1030 - Remote driver 24Vdc

Rev. 26/09/2023



Adjustable linear luminaire, suitable for wall, ceiling or ground installation as a stand-alone floodlight. Equipped with secondary optics for different types of light distribution, this Matrix version is particularly suited for the oblique illumination of building façades, to highlight their texture or accentuate the architectural details of historical buildings. Lamp with passive circuit, therefore dimmable with all systems.



FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall, ceiling and stand installation

PROTECTION

IP 67 - IK 08

BODY

Extruded aluminium alloy

BOX

NA

FRAME

All glass

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Standard Silicone rubber glue Tx-40°/+180°C

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 30 x L 1030 x W 30

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

DRIVER

Remote Driver 24Vdc NOT INCLUDED

DRIVER CURRENT

N.A.

CONTROL

Remote DALI dimmable

ABSORBED POWER

16W

SOURCE

LED

SOURCE FLUX

1800 lm

FIXTURE SOURCE

1479 lm

APPARENT EFFICIENCY

82 %

INSULATION CLASS

III

CCT LED

2700K

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

PHOTOBIOLOGICAL RISK

RG1

OPTIK DISTRIBUTION

Silk printed clear glass LTF>90°

BEAM OPENING













Adjustable/Oval 20°x40°

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

	F.PIA.463.1030 L 1030	Anti-glare visor
	E.CAV.540.020 L 2 mt	Cable H05RN-F
	E.CAV.540.050 L 5 mt	Cable H05RN-F
	E.CAV.540.100 L 10 mt	Cable H05RN-F
	MOR682P/2V L 72 x Ø 22	Connector IP68 2Ways/2Poles
	MOR685P/3VS L 106 x W 140 x H 38	Connection Box IP68 3Ways/5Poles
	MOR685P/4VS L 106 x W 120 x H 38	Connection Box IP68 4Ways/5Poles
	E.TRA.631 L 106 x W 33 x H 22 - 1 Driver for 1 Lamp	Driver 15W 24Vdc IP20 - ON/OFF
	E.TRA.632 L 124 x W 80 x H 22 - 1 Driver for 1-4 Lamps	Driver 70W 24Vdc IP20 - ON/OFF
	E.TRA.633 L 175 x W 63 x H 36 - 1 Driver for 1-5 Lamps	Driver 100W 24Vdc IP67 - DALI
	E.TRA.577 L 14 8x W 40 x H 32 - 1 Driver for 1 Lamp	Driver 25W 24Vdc IP67 - ON/OFF
	E.TRA.579 L 140 x W 63 x H 32 - 1 Driver for 2-5 Lamps	Driver 100W 24Vdc IP67 - ON/OFF



24V ON/OFF

HUB.24V.001.ND Hub 70W 24Vdc IP66 - ON/OFF
L 235 x W 200 x H 92 - 1 Hub for 1-4 Lamps



24V DALI-2

HUB.24V.001.DA2 Hub 70W 24Vdc IP66 - DALI-2
L 235 x W 200 x H 92 - 1 Hub for 1-4 Lamps



24V CASAMBI

HUB.24V.001.CA Hub 70W 24Vdc IP66 - CASAMBI
L 235 x W 200 x H 92 - 1 Hub for 1-4 Lamps