




Modo Bollard 603F1/NP70BB

Small Poles - Bollard Single Emission H. 600

Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions for a bollard system oriented according to the light requirements. Luminaire capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

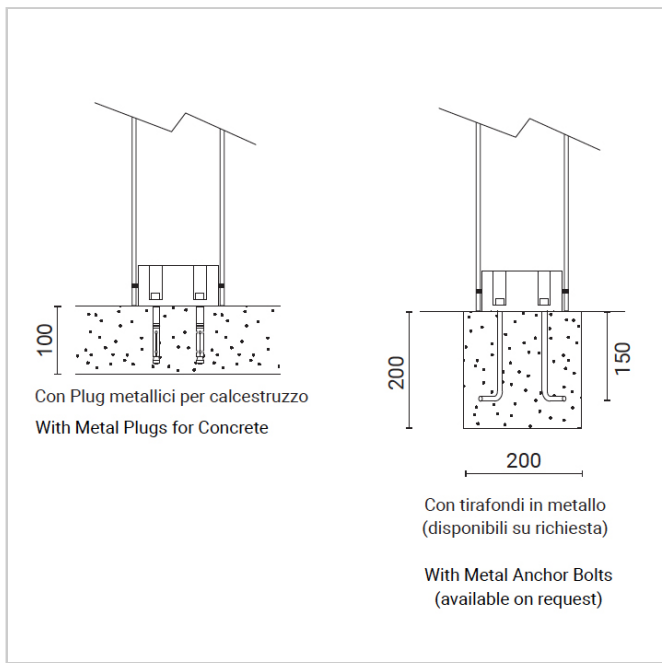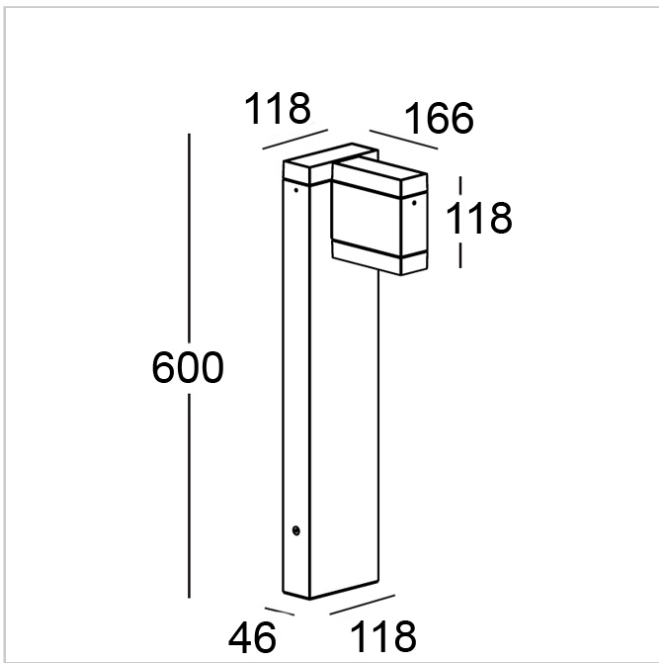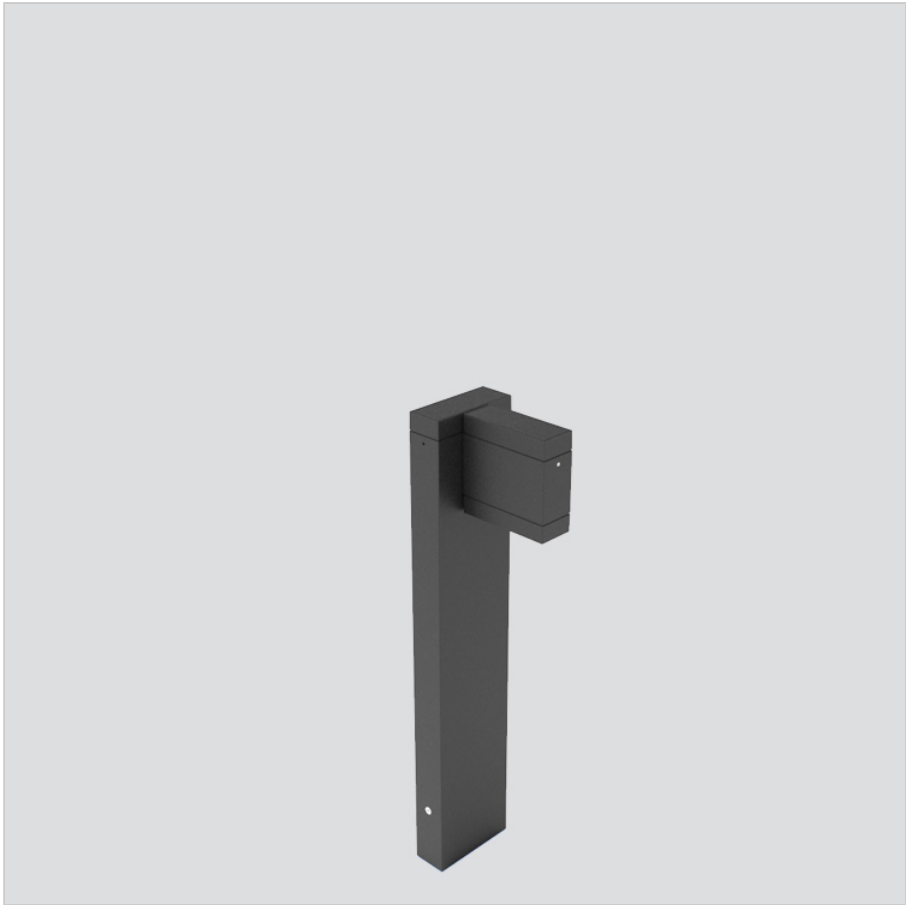

PHOTOMETRICAL DATA



FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 600 x L 118 x W 166

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz





DRIVER

Built-in	SOURCE FLUX 300 lm	CCT LED 4000K
DRIVER CURRENT 700mA	FIXTURE SOURCE 177 lm	CRI >80
CONTROL ON/OFF	APPARENT EFFICIENCY 59 %	STEP MACADAM 3
SPECIFIC WIRING Inclusa/Included	INSULATION CLASS I	LIFE TIME TM-21 L80B10 80000h Ta 25°C
POWER MODULE LED 2W	OVERVOLTAGE PROTECTION 2kV-4kV	PHOTOBIOLOGICAL RISK RG1
ABSORBED POWER 3.5W	OPERATING TA 50 °	BEAM OPENING Single Straight Blade/4°
SOURCE LED	ENERGETIC CLASS A	

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES

	MOR683P/2V Connector IP68 2Way/3Poles L 82 x Ø 28
	MOR685P/3V Connector Y IP68 3Ways/5Poles L 147 x W 73 x H 33
	E.TRA.580 Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
	KIT.020 Ground anchoring system