



Passo 15

Product code


PAS15ANX231NWA2



Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2145 lm
Source efficiency	183,6 lm/W
Delivered flux	1525 lm
Delivered efficiency	117,3 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	4000 K
Beam angle	narrow wall washer
Mounting	ground-recessed
Finishing	silver anodized
Net weight	1,4Kg

Technical drawing

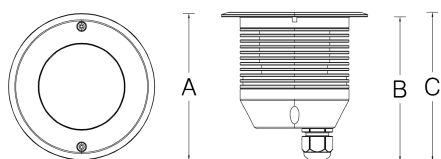

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, anodized aluminium alloy collar

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage

Specifications




Dimensions

A	129mm	B	126mm
C	131mm		



Photometry

narrow wall washer



4000 K	0.2 m	29,8 Klux
1,19 Kcd	0.5 m	4,8 Klux
1,52 Klm	1 m	1,2 Klux
13	2 m	298 lux
	5 m	48 lux


Lighting effects



Passo 15

Product code

PAS15ANX231NWA2

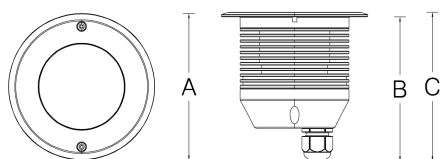Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		