




Modo Bollard 603F1/HP70WB

Small Poles - Bollard Single Emission H. 600


Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions for a bollard system oriented according to the light requirements. Luminaire capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

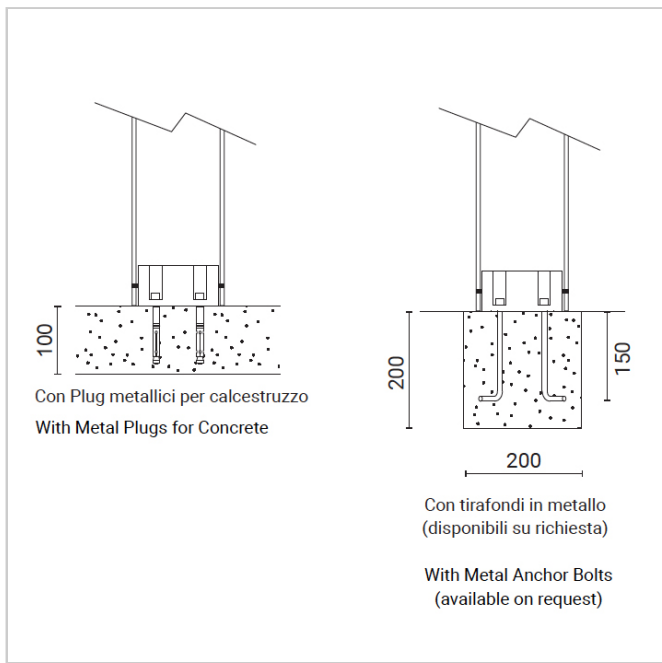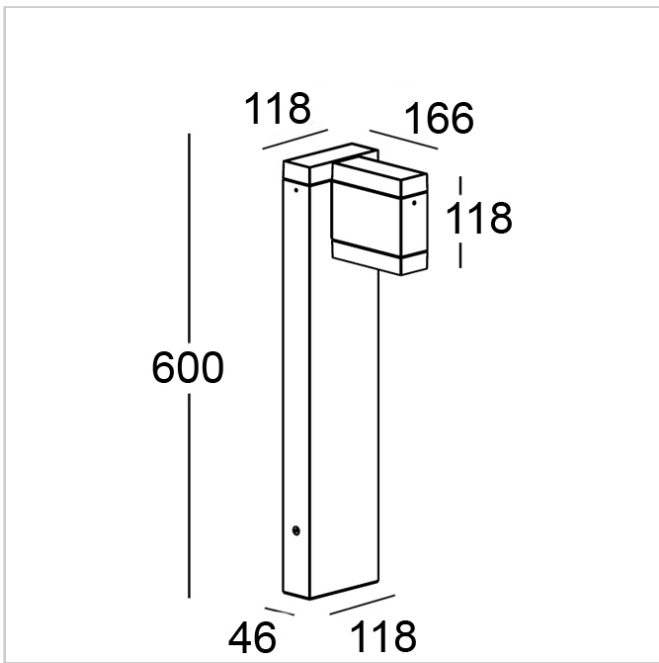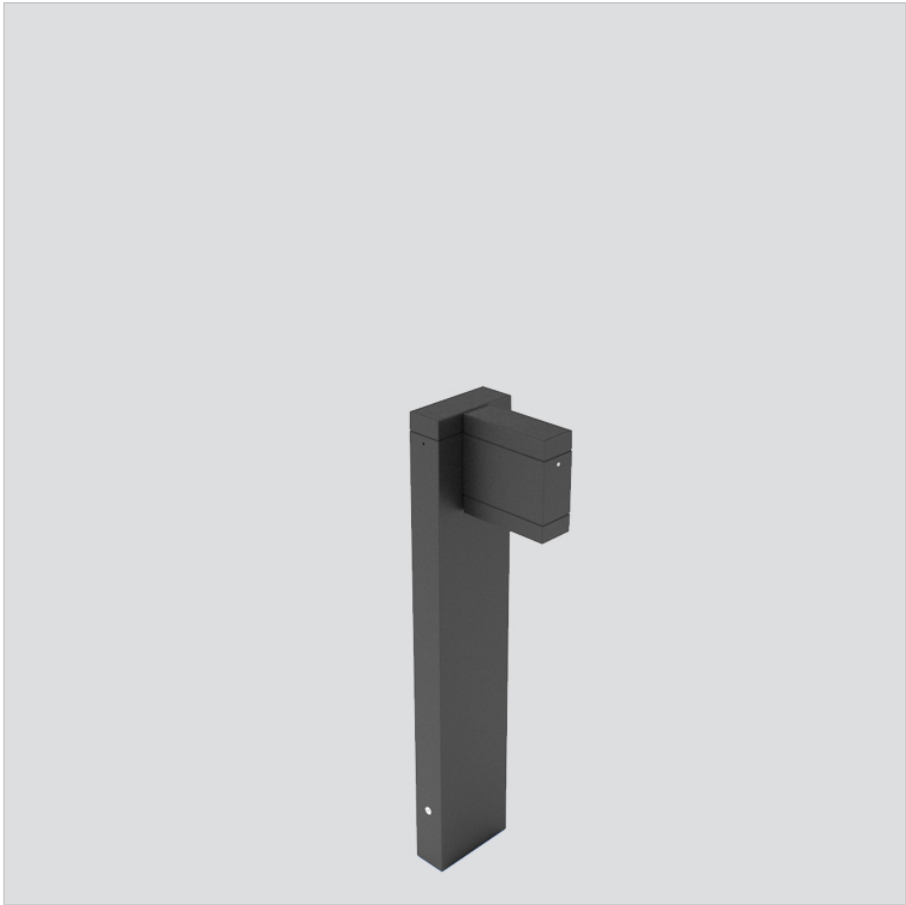

PHOTOMETRICAL DATA

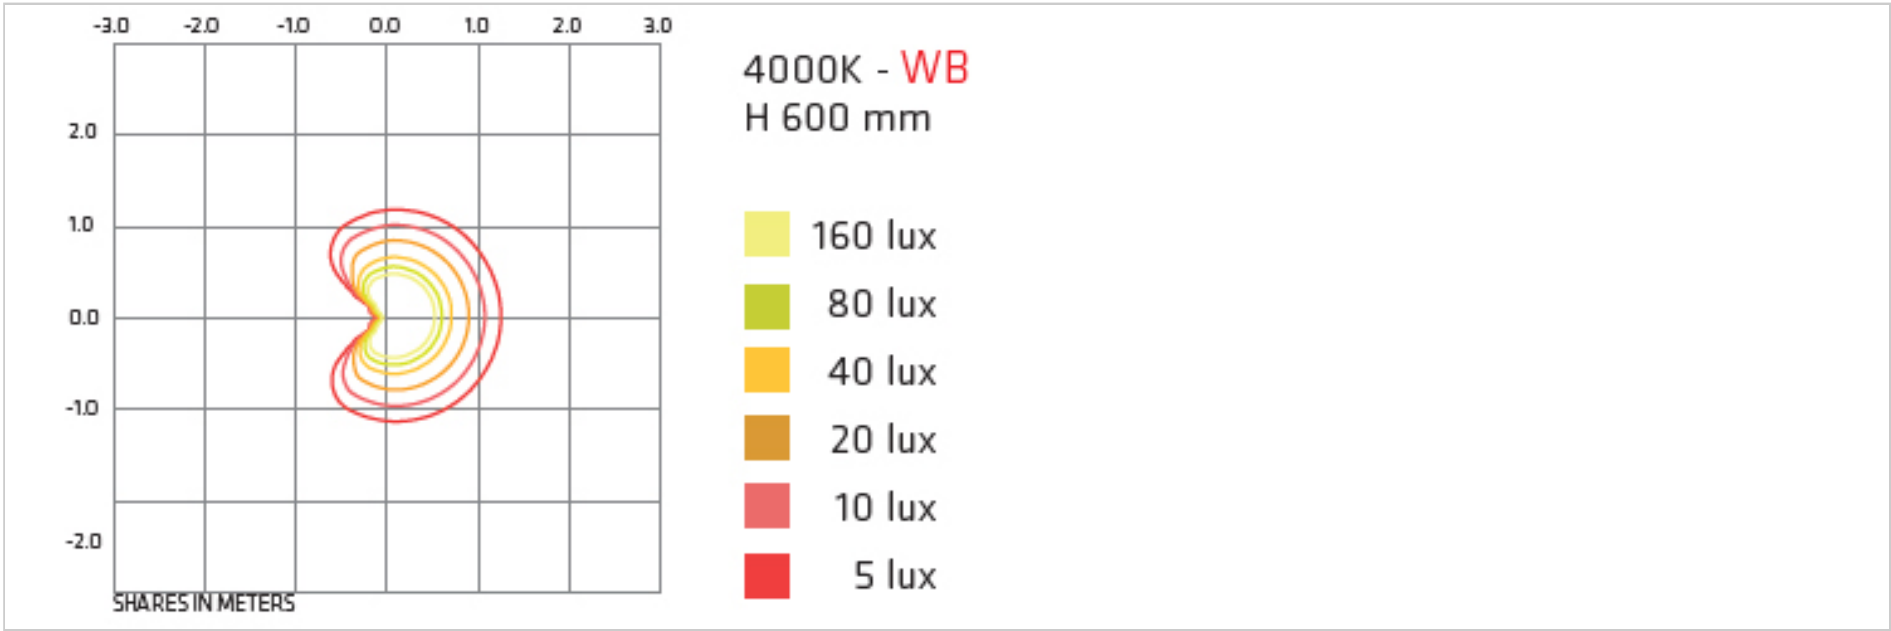

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 600 x L 118 x W 166

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in





DRIVER CURRENT

700mA

CONTROL

ON/OFF	FIXTURE SOURCE 326 lm	CCT LED 2700K
SPECIFIC WIRING Inclusa/Included	APPARENT EFFICIENCY 43 %	CRI >80
POWER MODULE LED 6W	INSULATION CLASS I	STEP MACADAM 3
ABSORBED POWER 8W	OVERVOLTAGE PROTECTION 2kV-4kV	LIFE TIME TM-21 L80B10 80000h Ta 25°C
SOURCE LED	OPERATING TA 50 °	PHOTOBIOLOGICAL RISK RG1
SOURCE FLUX 750 lm	ENERGETIC CLASS A	BEAM OPENING Single/50°

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES

	MOR683P/2V Connector IP68 2Way/3Poles L 82 x Ø 28
	MOR685P/3V Connector Y IP68 3Ways/5Poles L 147 x W 73 x H 33
	E.TRA.580 Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
	KIT.020 Ground anchoring system