


Cut 45 Wall Recessed 4045R/WRCC4L

Wall Recessed - Recessed 4 windows Ø45 - Remote driver max 700mA

Rev. 20/03/2024



Cut is the new line of steplight with grazing light born to create suggestive light and shadow effects, available in diameters of 45 mm and 70 mm. Design to give life to residential and public walk ways, also available with dedicated wall and ceiling version , making itself almost invisible but keeping light and atmosphere created the main characters of the scene. With one, two or four slots , Cut becomes a perfect fixture for soft or strong effects, for single or series installations. IP67 degree protection combined with AcquaStop system for anti-condensation protection make Cut a reliable and safe product, to inspire light emotions.

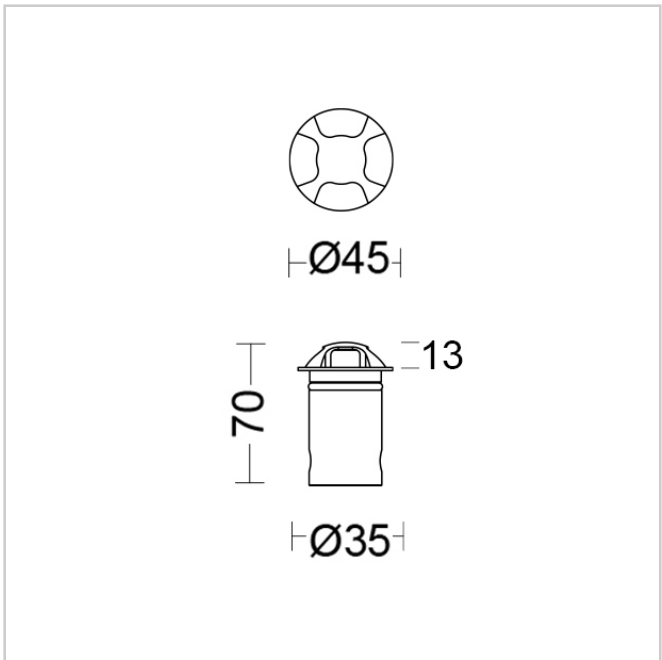

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Inground or wall recessed

PROTECTION

IP 67 - IK 08

BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

BOX

Ploypropylene (PP)30% fiber UVStabilized
GWT750

SCREEN

Transparent Polycarbonate

SEALS

Closed-cell EPDM rubber

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 70 x Ø 45

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

max 700mA

DRIVER

Remote Driver NOT INCLUDED

CONTROL

Remote DALI dimmable

ABSORBED POWER

2W

SOURCE

LED

SOURCE FLUX

286 lm

FIXTURE SOURCE

81 lm

APPARENT EFFICIENCY

28 %

INSULATION CLASS

III

OPERATING TA

-20°+ 50°

CCT LED

3000K

CRI

80

STEP MACADAM

3


OPTIK DISTRIBUTION

PMMA Lens

BEAM OPENING













Diffused 4 windows


COLORS

								
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006	55 GREEN COOL MINT RAL 6019

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

	D.BOX.030.01 H 100 x Ø 115	Inground formwork
	D.BOX.032.01 H 80 x Ø 40	Short formwork
	E.CAV.540.020 L 2 mt	Cable H05RN-F
	E.CAV.540.050 L 5 mt	Cable H05RN-F
	E.CAV.540.100 L 10 mt	Cable H05RN-F
	MOR682P/2V L 72 x Ø 22	Connector IP68 2Ways/2Poles
	E.TRA.621.700 L 111 x W 52 x H 22 - 1 Driver for 1-8 Lamps	Driver 20W 700mA IP20 - ON/OFF
	E.TRA.623.700 L 163 x W 30 x H 21 - 1 Driver for 1-14 Lamps	Driver 36W 700mA IP20 - ON/OFF
	E.TRA.634.700 L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps	Driver 60W 700mA IP20 - ON/OFF
	E.TRA.635.700 L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps	Driver 60W 700mA IP20 - DALI2
	E.TRA.636.700 L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps	Driver 60W 700mA IP20 - CASAMBI
	E.TRA.553.700 L 120 x W 38 x H 25 - 1 Driver for 1-8 Lamps	Driver 20W 700mA IP67 - ON/OFF



E.TRA.584.700 Driver 30W 700mA IP68 – DALI2
L 121 x W 53 x H 26 – 1 Driver for 1-14 Lamps



HUB.700.001.ND Hub 700mA IP66 – ON/OFF with driver 60W IP20
L 235 x W 200 x H 92 – 1 Hub for 1-8 Lamps



HUB.700.001.DA2 Hub 700mA IP66 – DALI-2 with driver 60W IP20
L 235 x W 200 x H 92 – 1 Hub for 1-8 Lamps



HUB.700.001.CA Hub 700mA IP66 – CASAMBI with driver 60W IP20
L 235 x W 200 x H 92 – 1 Hub for 1-8 Lamps