



Up&Down Wall 7500W/WD3.MB

Wall - Wall luminaire DALI Double Emission - Built-in driver


Rev. 04/11/2024



Wall luminaire configurable in single and double emission, ideal for grazing lighting of external facades. Up&Downd is equipped with various secondary optics for controlling the light flow, which allow design flexibility through different combinations of direct and indirect emission.

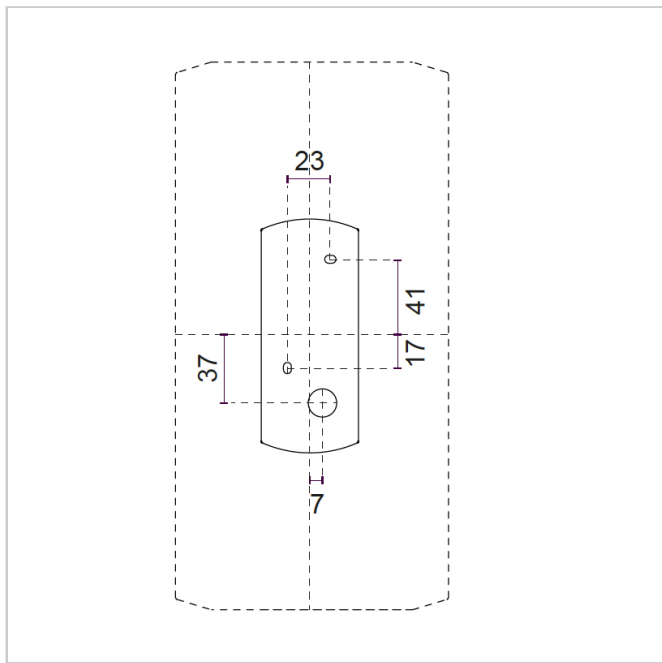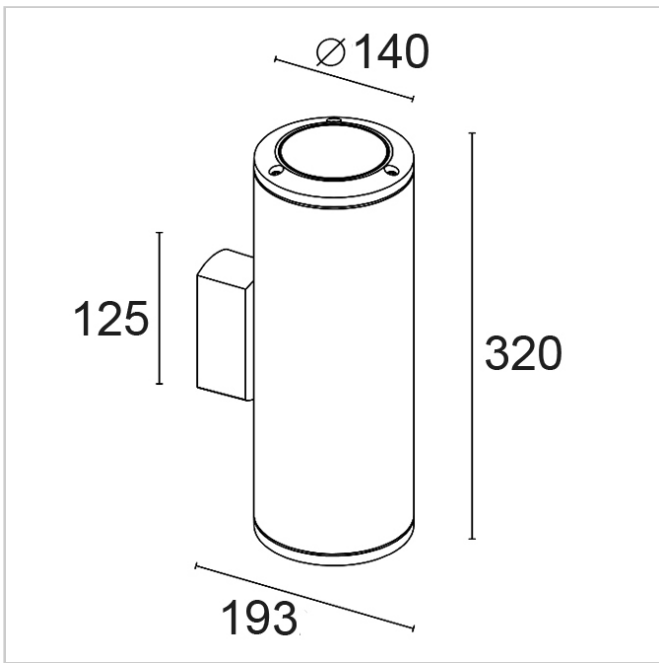

PHOTOMETRICAL DATA

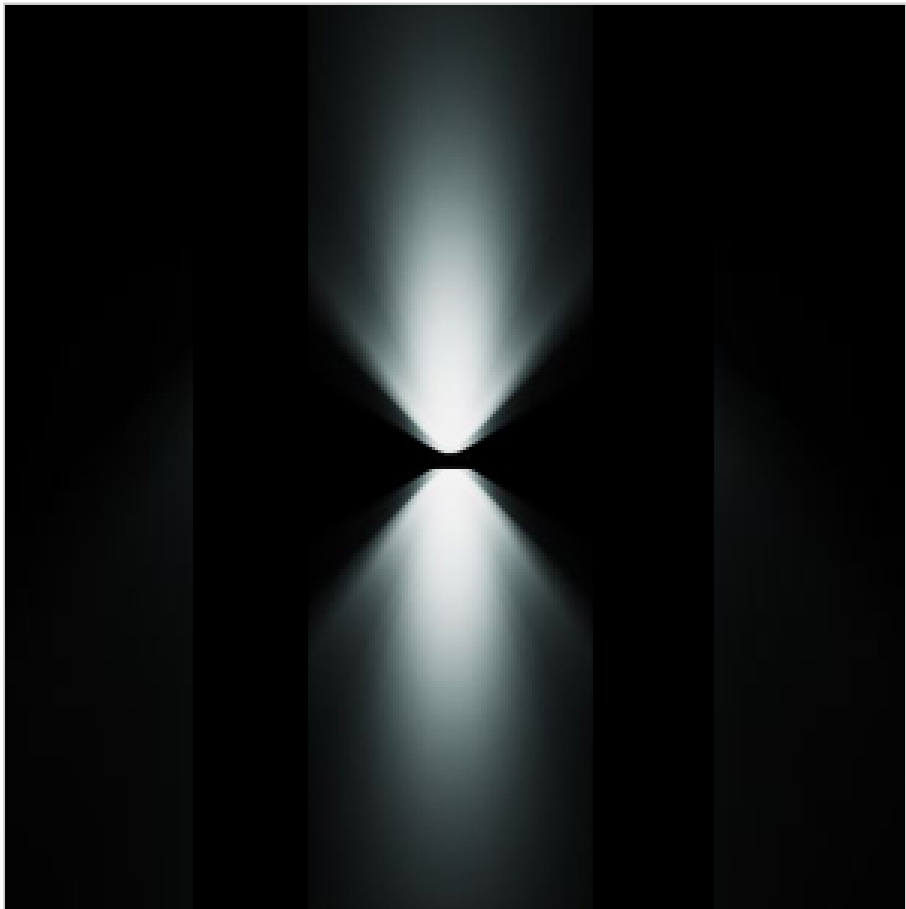

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 66 - IK 08

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 6mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 320 x W 193 x Ø 140

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER


Built-in	<b>SOURCE FLUX</b> 3854 lm	<b>CCT LED</b> 3000K
<b>DRIVER CURRENT</b> 800mA	<b>FIXTURE SOURCE</b> 3046 lm	<b>CRI</b> >80
<b>CONTROL</b> DALI-2 integrated	<b>APPARENT EFFICIENCY</b> 79 %	<b>STEP MACADAM</b> 3
<b>POWER MODULE LED</b> 32W	<b>INSULATION CLASS</b> I	<b>LIFE TIME TM-21</b> L80B10 80000h Ta 25°C
<b>ABSORBED POWER</b> 34W	<b>OVERVOLTAGE PROTECTION</b> 2kV-4kV	<b>PHOTOBIOLOGICAL RISK</b> RG0
<b>SOURCE</b> LED COB	<b>OPERATING TA</b> 50 °	<b>BEAM OPENING</b> Dual Flood/38°+38°

COLORS

							
<b>00</b> PURE WHITE RAL 9016	<b>01</b> BLACK RAL 9005	<b>10</b> WHITE RAL 9010	<b>24</b> BRONZE	<b>25</b> RUST	<b>30</b> ANTHRACIT E	<b>35</b> SLATE GREY	<b>40</b> GREY RAL 9006

This product is also available with traditional electrifications. Contact us for more information.

ACCESSORIES

	<b>E.TRA.580</b> Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
---	--