

Ghostbeam 2C

Product code


GHB02ANX230WWA1



Features

IP rating	IP66/67
IK rating	10
Source type	High power LED
LED number	2
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	560 lm
Source efficiency	136,5 lm/W
Delivered flux	450 lm
Delivered efficiency	84,2 lm/W
Input power	5,5W
Voltage	230 V 50/60 Hz
Insulation class	insulation class II
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	3000 K
Beam angle	wide wall washer
Mounting	ground-recessed
Finishing	silver anodized
Net weight	1kg

Technical drawing

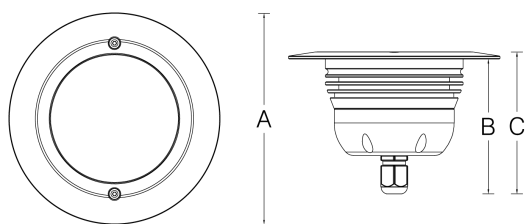

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone sealing, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage, thermal (shut off)

Specifications




Dimensions

A	149mm	B	95mm
C	100mm		



Photometry

wide wall washer



3000 K	0.2 m	15,5 Klux
619,15 cd	0.5 m	2,5 Klux
448,72 lm	1 m	619 lux
5	2 m	155 lux
	5 m	25 lux


Lighting effects



Ghostbeam 2C

Product code

GHB02ANX230WWA1

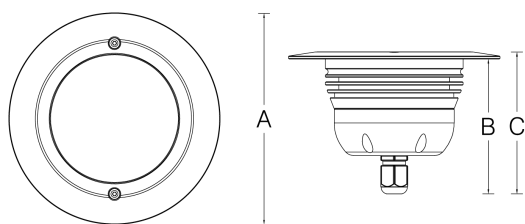Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	149mm	B	95mm
C	100mm		