


Modo Wall 601W1/HP70AB

Wall - Module Single Emission


Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions, capable of being wallwashers, vertically or horizontally, oriented according to the light requirements. It also offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

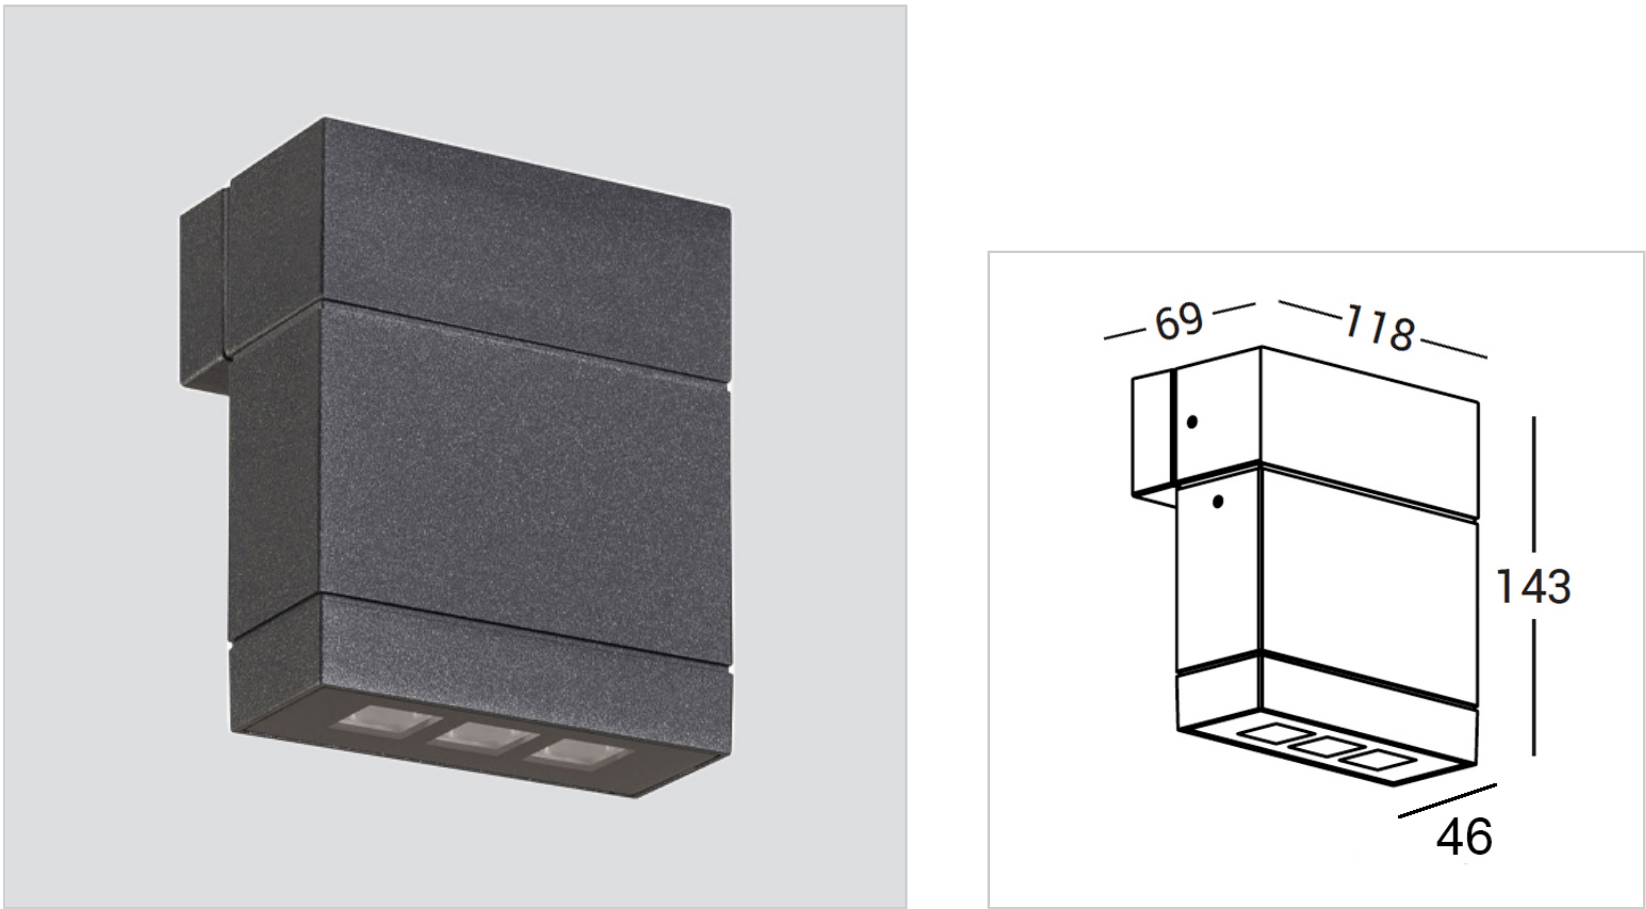

PHOTOMETRICAL DATA

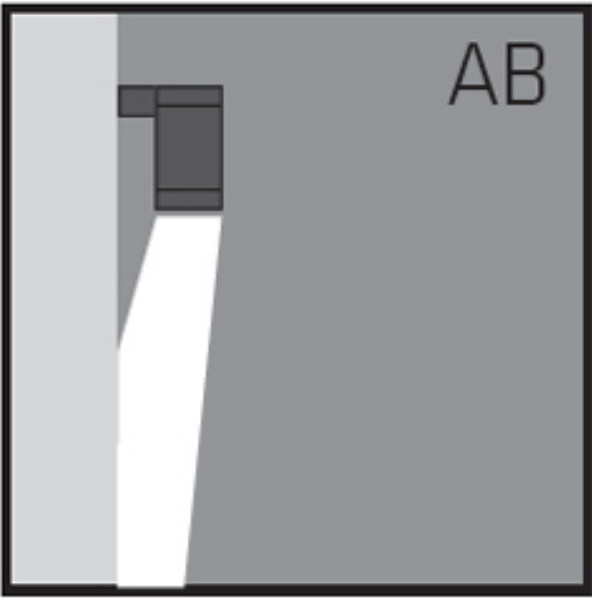	HEIGHT - DIAMETER		MAX LUX
	Hmt.1 - Ømt.1.11	•	2268
	Hmt.2 - Ømt.2.22	•	567
	Hmt.3 - Ømt.3.34	•	252
	Hmt.4 - Ømt.4.45	•	142
	Hmt.5 - Ømt.5.56	•	91



FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 143 x L 118 x W 69

ELECTRICAL SPECIFICATIONS

POWER SUPPLY


220-240Vac 50/60Hz

DRIVER Built-in	SOURCE FLUX 750 lm	CCT LED 2700K
DRIVER CURRENT 700mA	FIXTURE SOURCE 627 lm	CRI >80
CONTROL ON/OFF	APPARENT EFFICIENCY 84 %	STEP MACADAM 3
SPECIFIC WIRING Inclusa/Included	INSULATION CLASS I	LIFE TIME TM-21 L80B10 80000h Ta 25°C
POWER MODULE LED 6W	OVERVOLTAGE PROTECTION 2kV-4kV	PHOTOBIOLOGICAL RISK RG1
ABSORBED POWER 8W	OPERATING TA 50 °	BEAM OPENING Single/Asymmetric
SOURCE LED	ENERGETIC CLASS A	

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES

	E.TRA.580 Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
---	--