



Platho 200C 4251C/NR50MB.99

Ceiling Recessed – Square ceiling recessed L. 200 LED ARRAY – Built-in driver

Rev. 31/10/2023



Recessed ceiling fixture equipped with secondary optics for different light distributions, useful for grazing illumination of facades and architectural elements, or with etched glass for diffused distribution combined with glare control. Available with LED AC version or with Driver. Dali dimmable on request with extra charge.

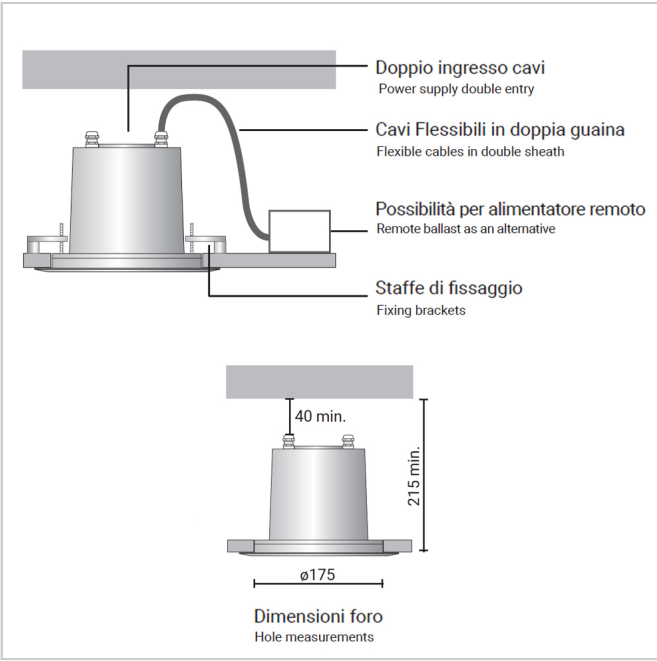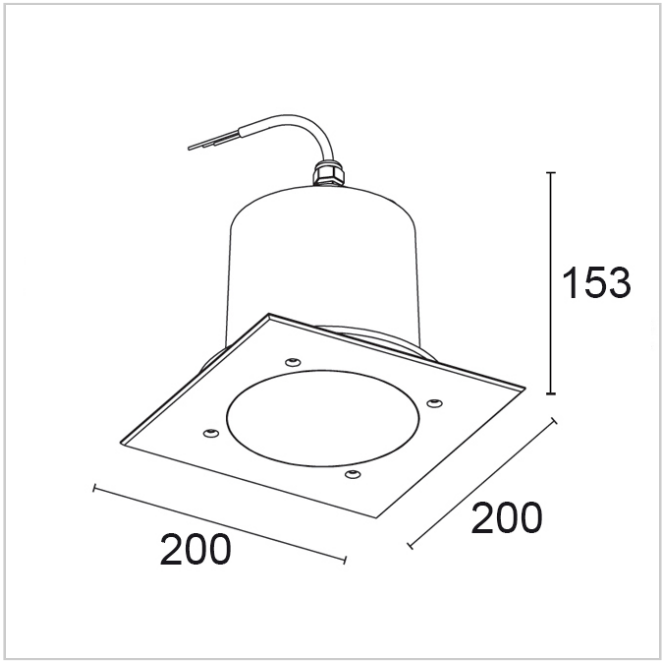

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ceiling installation

PROTECTION

IP 67 – IK 10

BODY

Die-cast aluminium

BOX

Ploypropylene (PP)30% fiber UVStabilized
GWT750

FRAME

Stainless Steel AISI316L

SCREEN

Tempered extra-clear glass 15mm with silk-
screen printing

SEALS

Molded silicone gasket UV Resist

SCREWS

Stainless steel A2

SIZES

H 153 x L 200 x W 200

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in

DRIVER CURRENT

500mA

CONTROL

DALI available on request

SPECIFIC WIRING

Inclusa/Included

WIRING

Included

POWER MODULE LED

12W

ABSORBED POWER

14W

SOURCE

LED ARRAY

SOURCE FLUX

1780 lm

FIXTURE SOURCE

1280 lm

APPARENT EFFICIENCY

72 %

INSULATION CLASS

I

OVERVOLTAGE PROTECTION

2kV-4kV

OPERATING TA

50 °

ENERGETIC CLASS

A

CCT LED

4000K

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

PHOTOBIOLOGICAL RISK

RG1

BEAM OPENING

Downlight Flood/32°32°

COLORS



99
STEEL