



# Passo 15

## Product code


PAS15ANX231CWNB



## Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2195 lm
Source efficiency	187,7 lm/W
Delivered flux	960 lm
Delivered efficiency	73,7 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	5700 K
Beam angle	17°
Mounting	ground-recessed
Finishing	silver anodized
Net weight	1,4Kg

## Technical drawing

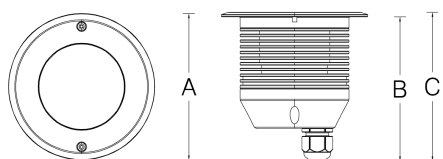

## Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

## Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, anodized aluminium alloy collar

## Light control

On/off control, no dimming.

## Connection

power supply cable length 0,8m

## Protections

short circuit, overload, overvoltage

## Specifications



## Dimensions


A	129mm	B	126mm
C	131mm		



Photometry




Lighting effects

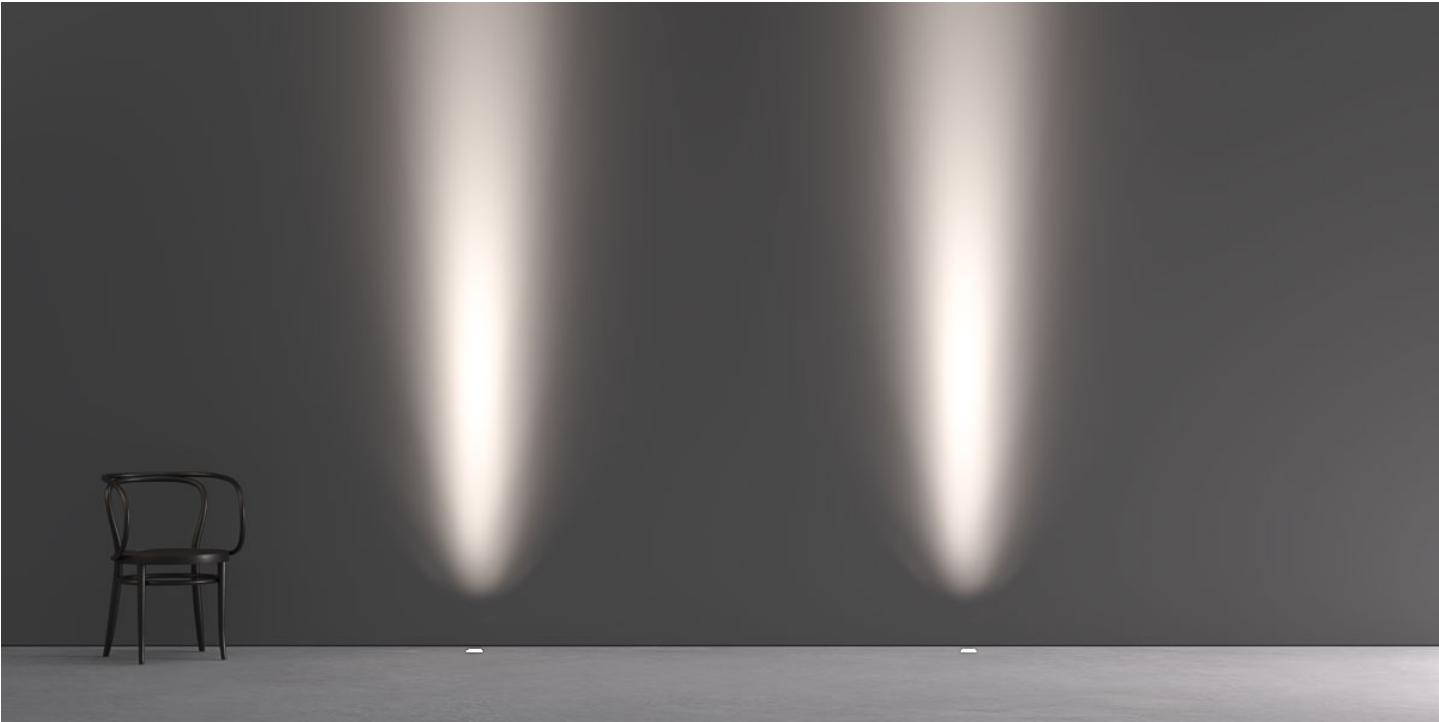

# Passo 15

**Product code**

PAS15ANX231CWNB

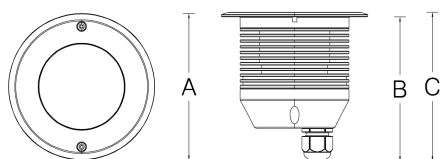**Client****Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		