

Ghostbeam 2C

Product code


GHB02ANX230CWA3



Features

IP rating	IP66/67
IK rating	10
Source type	High power LED
LED number	2
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	640 lm
Source efficiency	156,0 lm/W
Delivered flux	510 lm
Delivered efficiency	95,7 lm/W
Input power	5,5W
Voltage	230 V 50/60 Hz
Insulation class	insulation class II
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	5700 K
Beam angle	wide asymmetrical
Mounting	ground-recessed
Finishing	silver anodized
Net weight	1kg

Technical drawing

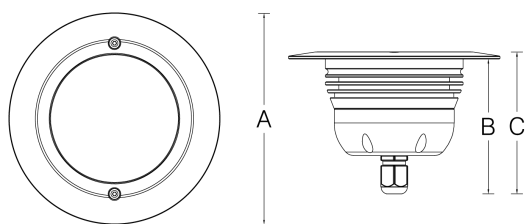

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone sealing, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage, thermal (shut off)

Specifications




Dimensions

A	149mm	B	95mm
C	100mm		



Photometry

wide asymmetrical



5700 K	0.2 m	5,8 Klux
230,93 cd	0.5 m	924 lux
509,72 lm	1 m	231 lux
5	2 m	58 lux
	5 m	9 lux


Lighting effects



Ghostbeam 2C

Product code

GHB02ANX230CWA3

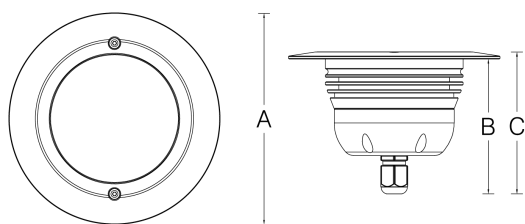Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	149mm	B	95mm
C	100mm		