



Up&Down Q Wall 9810W/WD0.MB

Wall - Wall luminaire DALI Double Emission - Built-in driver


Rev. 04/11/2024



Wall luminaire configurable in single and double emission, ideal for grazing lighting of external facades. Up&Down-Q is equipped with various secondary optics for controlling the light flow, which allow design flexibility through different combinations of direct and indirect emission.

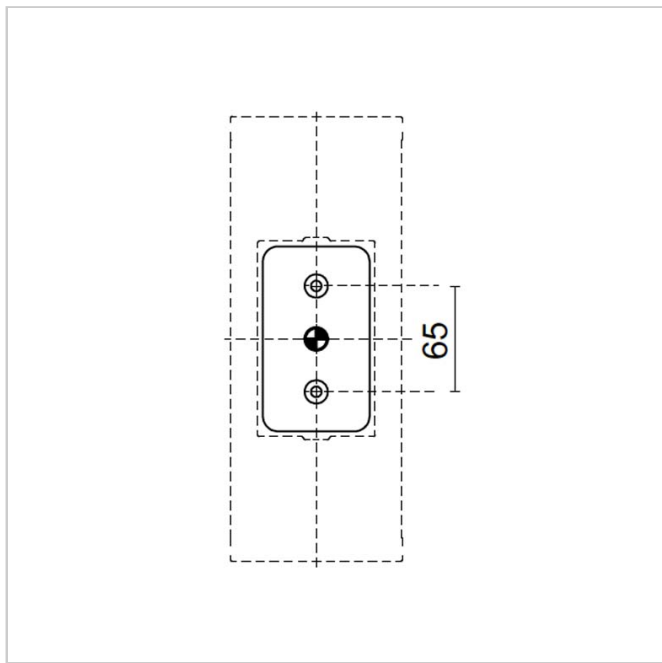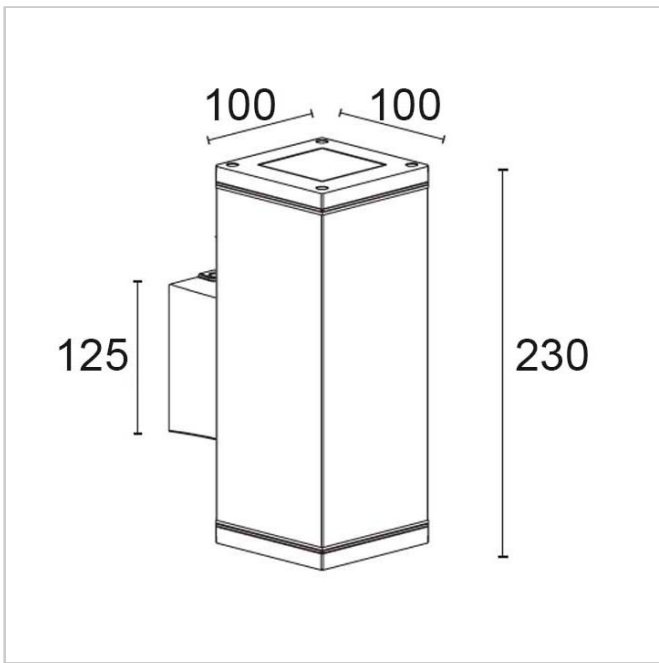

PHOTOMETRICAL DATA

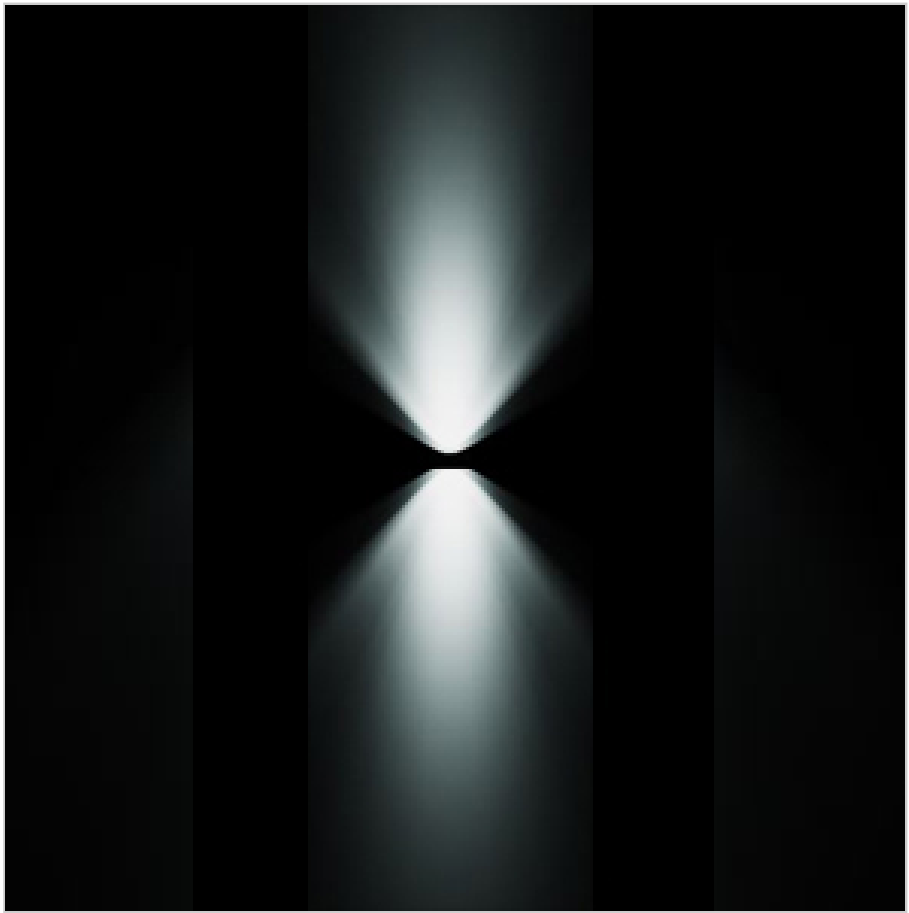

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 6mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 230 x L 100 x W 165

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60hZ

DRIVER


Built-in	SOURCE FLUX 2718 lm	CCT LED 3000K
DRIVER CURRENT 600mA	FIXTURE SOURCE 2478 lm	CRI >80
CONTROL DALI-2 integrated	APPARENT EFFICIENCY 91 %	STEP MACADAM 3
POWER MODULE LED 24W	INSULATION CLASS I	LIFE TIME TM-21 L80B10 80000h Ta 25°C
ABSORBED POWER 26W	OVERVOLTAGE PROTECTION 2kV-4kV	PHOTOBIOLOGICAL RISK RG0
SOURCE LED COB	OPERATING TA 50 °	BEAM OPENING Dual Flood/26°+26°

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

This product is also available with traditional electrifications. Contact us for more information.

ACCESSORIES

	E.TRA.580 Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
---	--