


Bloom Mini Bollard 5000F2/HRCCWB

Small Poles - Adjustable Small Pole H. 650 - Remote driver max 700mA

Rev. 18/05/2023



The minimal shape and the diameter of only 35mm give the BLOOM MINI BOLLARD series wide adaptability to any project. The reduced sizes and the three available heights guarantee total flexibility, allowing the integration of BLOOM MINI BOLLARD in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas, walkways or passageways, since LIGHT is the fundamental element for a correct perception of objects, spaces and emotions.

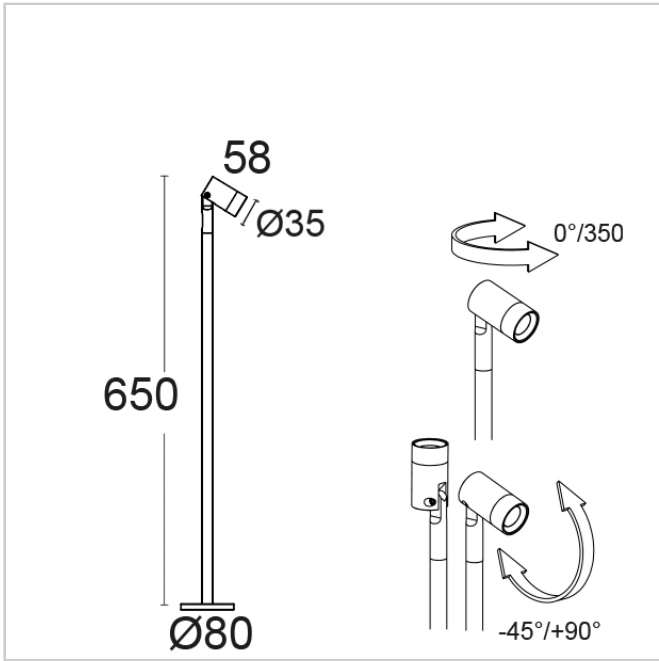

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 66 - IK 08

BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

SCREEN

Transparent extra-clear glass 6mm

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 650 x Ø 35 x Ø base 80

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

max 700mA

DRIVER

Remote Driver NOT INCLUDED

CONTROL

Remote DALI dimmable

ABSORBED POWER

2W

SOURCE

LED

SOURCE FLUX

220 lm

FIXTURE SOURCE

162 lm

APPARENT EFFICIENCY

74 %

INSULATION CLASS

III

OPERATING TA

-20°+ 50°

CCT LED

2700K

CRI

80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

BEAM OPENING

Wide Flood/40°

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE



25
RUST




30
ANTHRACIT
E



35
SLATE
GREY















40
GREY RAL
9006




55
GREEN
COOL MINT
RAL 6019

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

	KIT.023 Small pole Spike Kit H 350 x Ø 80
	KIT.024 Inground formwork kit for small pole H 110 x Ø 135
	E.CAV.540.020 Cable H05RN-F L 2 mt
	E.CAV.540.050 Cable H05RN-F L 5 mt
	E.CAV.540.100 Cable H05RN-F L 10 mt
	MOR682P/2V Connector IP68 2Ways/2Poles L 72 x Ø 22
	E.TRA.621.700 Driver 20W 700mA IP20 - ON/OFF L 111 x W 52 x H 22 - 1 Driver for 1-8 Lamps
	E.TRA.623.700 Driver 36W 700mA IP20 - ON/OFF L 163 x W 30 x H 21 - 1 Driver for 1-14 Lamps
	E.TRA.634.700 Driver 60W 700mA IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps
	E.TRA.635.700 Driver 60W 700mA IP20 - DALI2 L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps
	E.TRA.636.700 Driver 60W 700mA IP20 - CASAMBI L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps
	E.TRA.553.700 Driver 20W 700mA IP67 - ON/OFF L 120 x W 38 x H 25 - 1 Driver for 1-8 Lamps



E.TRA.584.700 Driver 30W 700mA IP68 – DALI2
L 121 x W 53 x H 26 – 1 Driver for 1-14 Lamps



HUB.700.001.ND Hub 700mA IP66 – ON/OFF with driver 60W IP20
L 235 x W 200 x H 92 – 1 Hub for 1-8 Lamps



HUB.700.001.DA2 Hub 700mA IP66 – DALI-2 with driver 60W IP20
L 235 x W 200 x H 92 – 1 Hub for 1-8 Lamps



HUB.700.001.CA Hub 700mA IP66 – CASAMBI with driver 60W IP20
L 235 x W 200 x H 92 – 1 Hub for 1-8 Lamps