

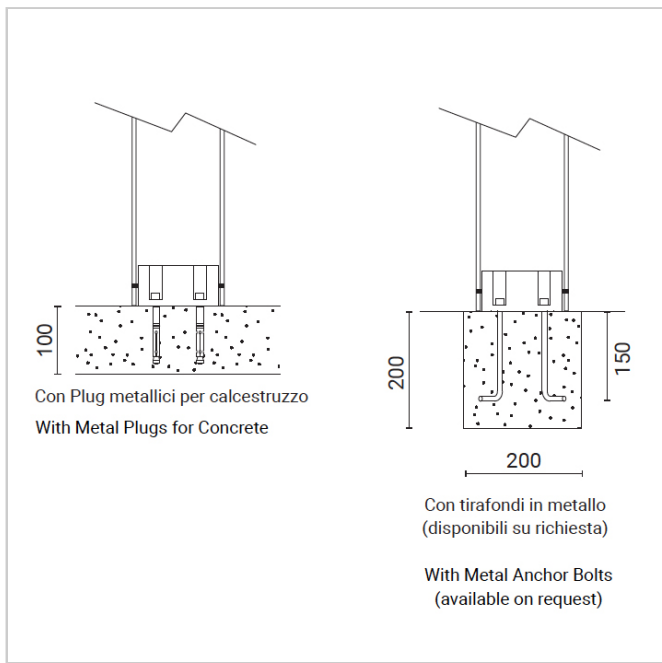
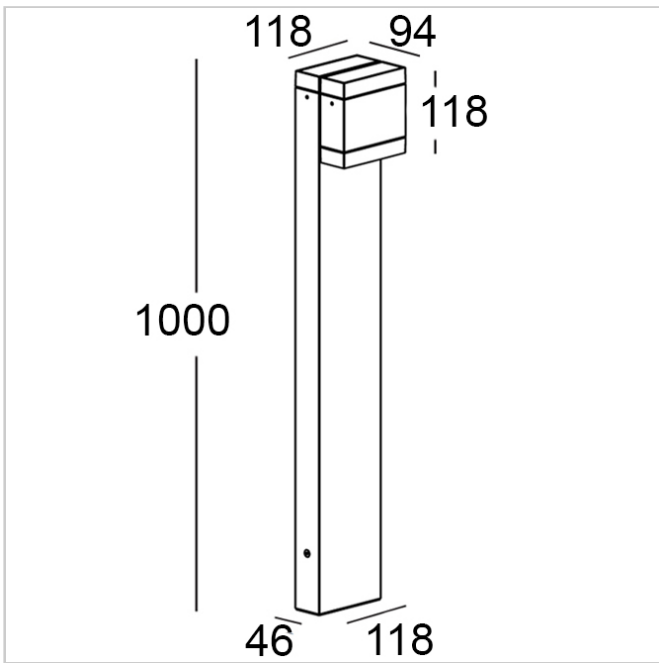
Modo Bollard 601F2/HD70A2

Small Poles – Bollard DALI Horizontal Single Emission H. 1000

Rev. 04/11/2024



A simple parallelepiped, with a minimal line and compact dimensions for a bollard system oriented according to the light requirements. Luminaire capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.



PHOTOMETRICAL DATA



FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 65 – IK 07

BODY

Die-cast aluminium

SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 1000 x L 118 x W 94

ELECTRICAL SPECIFICATIONS





POWER SUPPLY

220-240Vac 50/60Hz


DRIVER

Built-in	SOURCE FLUX 750 lm	CCT LED 2700K
DRIVER CURRENT 700mA	FIXTURE SOURCE 413 lm	CRI >80
CONTROL DALI-2 integrated	APPARENT EFFICIENCY 55 %	STEP MACADAM 3
SPECIFIC WIRING Inclusa/Included	INSULATION CLASS I	LIFE TIME TM-21 L80B10 80000h Ta 25°C
POWER MODULE LED 6W	OVERVOLTAGE PROTECTION 2kV-4kV	PHOTOBIOLOGICAL RISK RG1
ABSORBED POWER 8W	OPERATING TA 50 °	BEAM OPENING Single/Asymmetric
SOURCE LED	ENERGETIC CLASS A	

COLORS

							
00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE	25 RUST	30 ANTHRACIT E	35 SLATE GREY	40 GREY RAL 9006

ACCESSORIES

	E.CAV.538.020 L 2 mt	Cable H05BQ-F
	E.CAV.538.050 L 5 mt	Cable H05BQ-F
	E.CAV.538.100 L 10 mt	Cable H05BQ-F
	MOR685P/2V L 115 x Ø 34	Connector IP68 2Ways/5Poles
	MOR685P/3V L 147 x W 73 x H 33	Connector Y IP68 3Ways/5Poles
	E.TRA.580 L 37 x W 30 x H 30	Ultra compact type 2+3 hard wired surge protector
	KIT.020	Ground anchoring system