


Bloom Mini Bollard 5000F2/NRRCNB

Small Poles - Adjustable Small Pole H. 650 - Remote driver 24Vdc

Rev. 18/05/2023



The minimal shape and the diameter of only 35mm give the BLOOM MINI BOLLARD series wide adaptability to any project. The reduced sizes and the three available heights guarantee total flexibility, allowing the integration of BLOOM MINI BOLLARD in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas, walkways or passageways, since LIGHT is the fundamental element for a correct perception of objects, spaces and emotions.

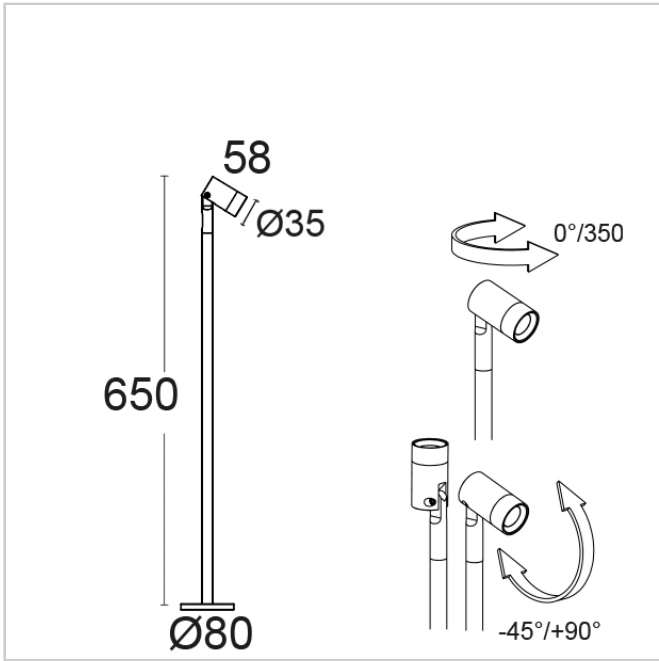

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 66 - IK 08

BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

SCREEN

Transparent extra-clear glass 6mm

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 650 x Ø 35 x Ø base 80

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

DRIVER

Remote Driver NOT INCLUDED

DRIVER CURRENT

24Vdc

CONTROL

ON/OFF

ABSORBED POWER

2W

SOURCE

LED

SOURCE FLUX

190 lm

FIXTURE SOURCE

150 lm

APPARENT EFFICIENCY

79 %

INSULATION CLASS

III

OPERATING TA

-20°+ 50°

CCT LED

4000K

CRI

80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

BEAM OPENING

Spot/15°

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE



25
RUST




30
ANTHRACIT
E



35
SLATE
GREY














40
GREY RAL
9006



55
GREEN
COOL MINT
RAL 6019

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

	KIT.023 Small pole Spike Kit H 350 x Ø 80
	KIT.024 Inground formwork kit for small pole H 110 x Ø 135
	E.CAV.540.020 Cable H05RN-F L 2 mt
	E.CAV.540.050 Cable H05RN-F L 5 mt
	E.CAV.540.100 Cable H05RN-F L 10 mt
	MOR682P/2V Connector IP68 2Ways/2Poles L 72 x Ø 22
	E.TRA.631 Driver 15W 24Vdc IP20 - ON/OFF L 106 x W 33 x H 22 - 1 Driver for 1-5 Lamps
	E.TRA.632 Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-25 Lamps
	E.TRA.577 Driver 25W 24Vdc IP67 - ON/OFF L 14 8x W 40 x H 32 - 1 Driver for 1-8 Lamps
	E.TRA.579 Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 9-30 Lamps
	HUB.24V.001.ND Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps