



Siluro 319-...OLD4

Urban Lighting - Pole H. 3600 with opal diffuser

Rev. 31/10/2023



Pole characterised by a linear and sober design, available in four different heights: 2100 mm, 2600 mm, 3100 mm, 3600 mm. The diffuser in polycarbonate supplied standard can be either transparent or opal. Its capacity for 360° light diffusion makes Siluro an evolutionary, complete and extremely efficient product. Pole designed to offer lighting solutions not only for large spaces, but also for smaller residential areas guaranteeing luminous efficiency and minimum energy consumption. Dali dimmable on request with extra charge.

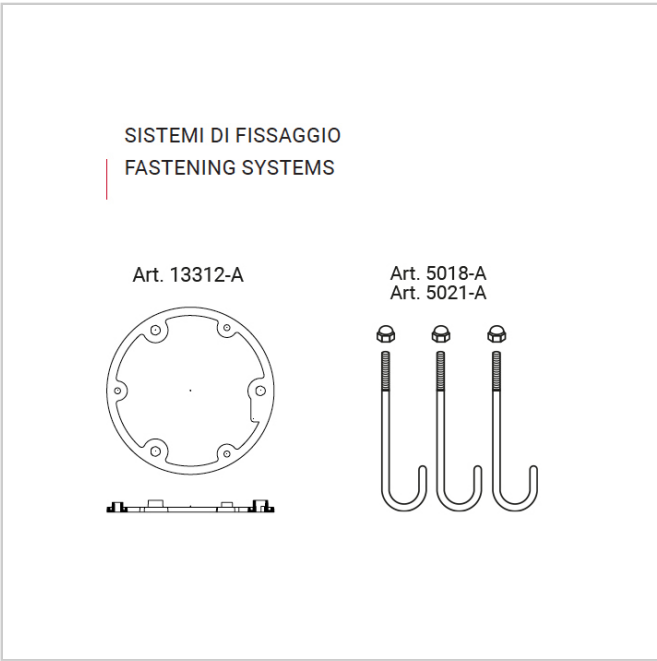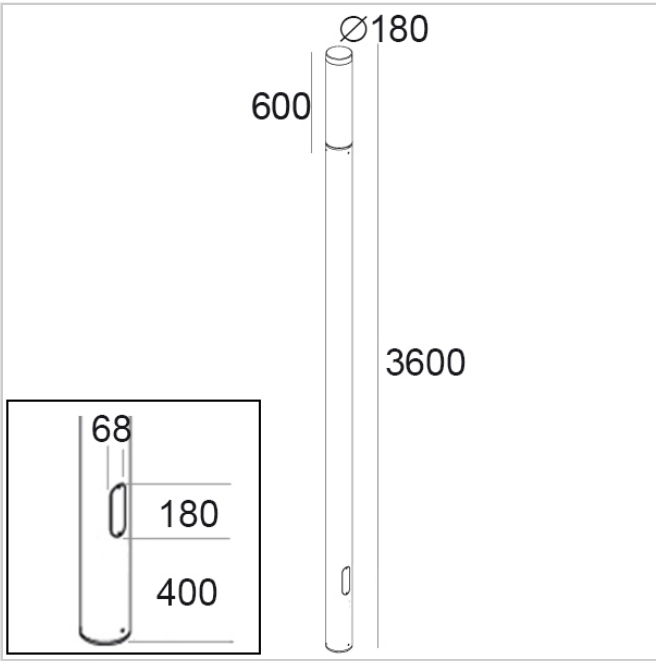

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ground installation

PROTECTION

IP 65 - IK 08

BODY

Pole: Extruded aluminium alloy - Body/Base:
Die-cast aluminium alloy

SCREEN

Opale Polycarbonate

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 3600 x Ø 180

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

220-240Vac 50/60Hz

DRIVER

Built-in

DRIVER CURRENT

450mA

CONTROL

DALI available on request

SPECIFIC WIRING

Inclusa/Included

POWER MODULE LED

36W

ABSORBED POWER

38W

SOURCE

LED

SOURCE FLUX

5200 lm

FIXTURE SOURCE

3880 lm

APPARENT EFFICIENCY

75 %

INSULATION CLASS

I

OVERVOLTAGE PROTECTION

4kV-6kV

OPERATING TA

50 °

ENERGETIC CLASS

A

CCT LED

4000K

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

PHOTOBIOLOGICAL RISK

RG1

BEAM OPENING

Diffuse 360°

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE



25
RUST



30
ANTHRACIT
E




35
SLATE
GREY



40
GREY RAL
9006

ACCESSORIES



E.TRA.580 Ultra compact type 2+3 hard wired surge protector

L 37 x W 30 x H 30