



# Passo 15

## Product code


PAS15SSX231WWA2



## Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2085 lm
Source efficiency	178,3 lm/W
Delivered flux	1480 lm
Delivered efficiency	114,0 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	3000 K
Beam angle	narrow wall washer
Mounting	ground-recessed
Finishing	stainless steel
Net weight	1,7Kg

## Technical drawing

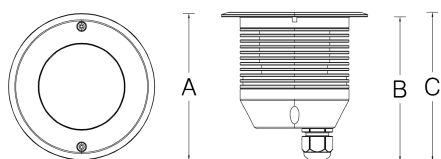

## Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

## Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, stainless steel collar

## Light control

On/off control, no dimming.

## Connection

power supply cable length 0,8m

## Protections

short circuit, overload, overvoltage

## Specifications




## Dimensions

A	129mm	B	126mm
C	131mm		



Photometry

narrow wall washer



3000 K	0.2 m	29,0 Klux
1,16 Kcd	0.5 m	4,6 Klux
1,48 Klm	1 m	1,2 Klux
13	2 m	290 lux
	5 m	46 lux


Lighting effects



# Passo 15

**Product code**

PAS15SSX231WWA2

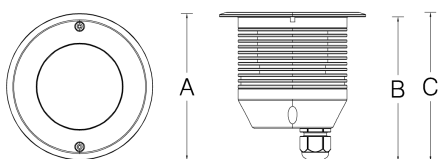**Client****Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		