



Passo 15

Product code


PAS15SSX231WWWB



Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2085 lm
Source efficiency	178,3 lm/W
Delivered flux	1515 lm
Delivered efficiency	116,7 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	3000 K
Beam angle	55°
Mounting	ground-recessed
Finishing	stainless steel
Net weight	1,7Kg

Technical drawing

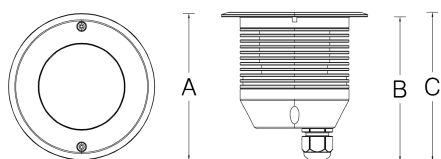

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, stainless steel collar

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage

Specifications




Dimensions

A	129mm	B	126mm
C	131mm		

Photometry

55°



3000 K	0.2 m	36,3 Klux
1,45 Kcd	0.5 m	5,8 Klux
1,52 Klm	1 m	1,5 Klux
13	2 m	363 lux
	5 m	58 lux


Lighting effects



Passo 15

Product code

PAS15SSX231WWWB

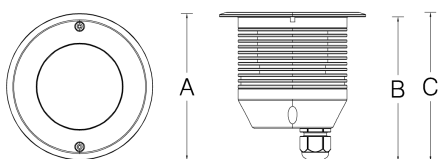Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		