



Passo 15

Product code


PAS15SSX231NWWN



Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2145 lm
Source efficiency	183,6 lm/W
Delivered flux	1505 lm
Delivered efficiency	115,9 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	4000 K
Beam angle	30°x50°
Mounting	ground-recessed
Finishing	stainless steel
Net weight	1,7Kg

Technical drawing

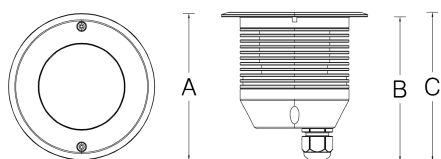

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, stainless steel collar

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage

Specifications




Dimensions

A	129mm	B	126mm
C	131mm		



Photometry

30°x50°



4000 K	0.2 m	52,2 Klux
2,09 Kcd	0.5 m	8,4 Klux
1,51 Klm	1 m	2,1 Klux
13	2 m	522 lux
	5 m	84 lux


Lighting effects



Passo 15

Product code

PAS15SSX231NWWN

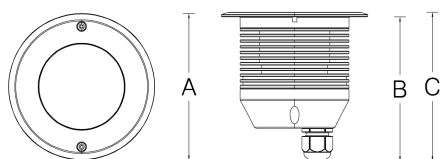Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		