

Passo 15

Product code


PAS15SSX231NWFL



Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2145 lm
Source efficiency	183,6 lm/W
Delivered flux	1560 lm
Delivered efficiency	120,1 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	4000 K
Beam angle	80°
Mounting	ground-recessed
Finishing	stainless steel
Net weight	1,7Kg

Technical drawing

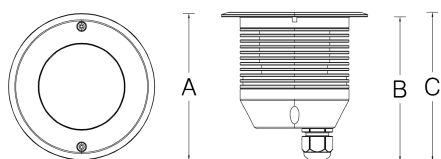

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, stainless steel collar

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage

Specifications




Dimensions

A	129mm	B	126mm
C	131mm		


Photometry

80°



4000 K	0.2 m	23,3 Klux
930,79 cd	0.5 m	3,7 Klux
1,56 Klm	1 m	931 lux
13	2 m	233 lux
	5 m	37 lux


Lighting effects

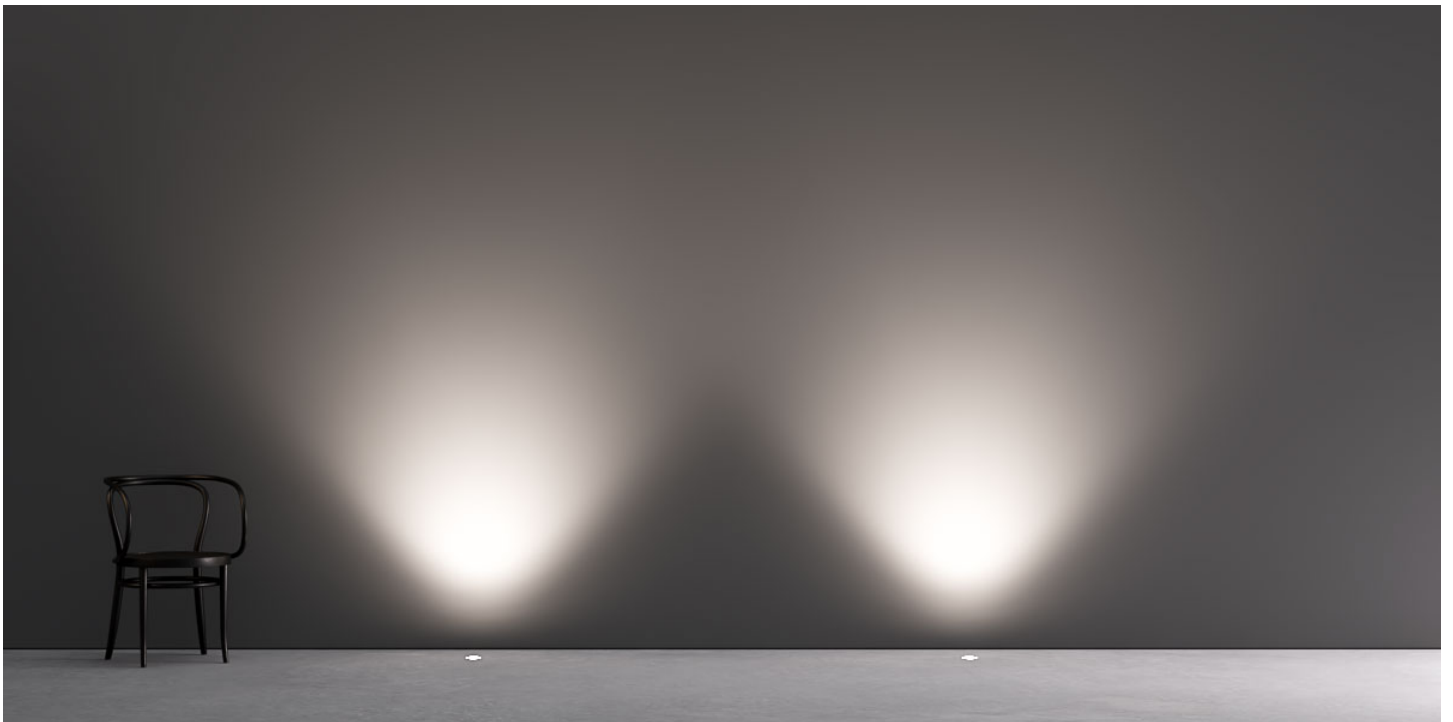

Passo 15

Product code

PAS15SSX231NWFL

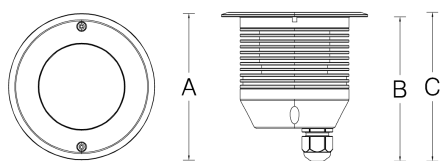Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		