



Passo 15

Product code


PAS15SSX231WWNB



Features

IP rating	IP66/67
IK rating	08
Source type	chip on board
LED number	1
CRI	80
Step McAdam	3
Source life time	>60.000h L70 B10 at 25°C ambient temperature
Source flux	2085 lm
Source efficiency	178,3 lm/W
Delivered flux	910 lm
Delivered efficiency	70,0 lm/W
Input power	13W
Voltage	230 V 50/60 Hz
Insulation class	insulation class I
Power supply	power supply unit on board
Management interface	on/off
Light colour/CCT	3000 K
Beam angle	17°
Mounting	ground-recessed
Finishing	stainless steel
Net weight	1,7Kg

Technical drawing

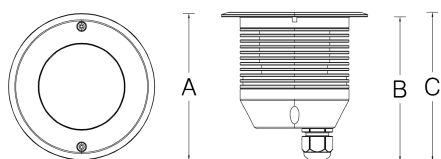

Temperature limits

Working temperature	from -30°C to +50°C
Storage temperature	from -50°C to +80°C
Max contact temp. (Ta 25°C)	<35°C

Construction

machine-crafted aluminium alloy, silicone gasket, tempered extra-clear sodium-calcium front glass, nickel-plated brass gland connector, stainless steel collar

Light control

On/off control, no dimming.

Connection

power supply cable length 0,8m

Protections

short circuit, overload, overvoltage

Specifications




Dimensions

A	129mm	B	126mm
C	131mm		

Photometry


17°



3000 K
6,04 Kcd
909,60 lm
13

0.5 m	24,2 Klux
1 m	6,0 Klux
2 m	1,5 Klux
5 m	242 lux
10 m	60 lux


Lighting effects

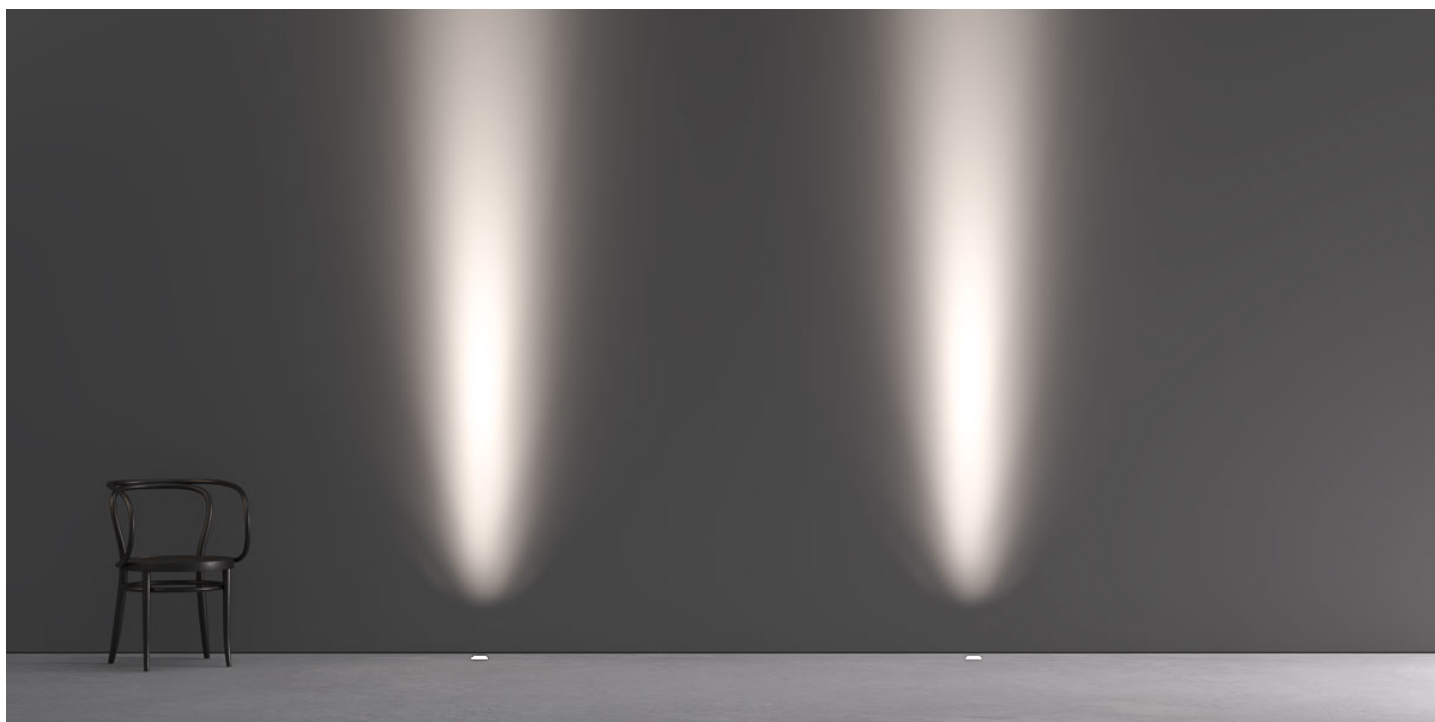

Passo 15

Product code

PAS15SSX231WWNB

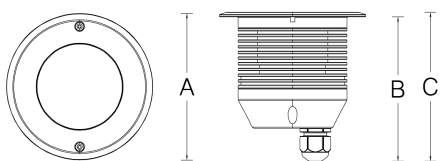Client**Project name****Order #****Type****Qty****Technical drawing****Dimensions**

A	129mm	B	126mm
C	131mm		